


EZP-LS Limited Space Precleaner

Big Features in a Small Package

Many conveyors and portables have tight space configurations. That means a belt cleaner must be small and compact to fit. The new EZP-LS Precleaner delivers a big cleaning job in a compact cleaner.

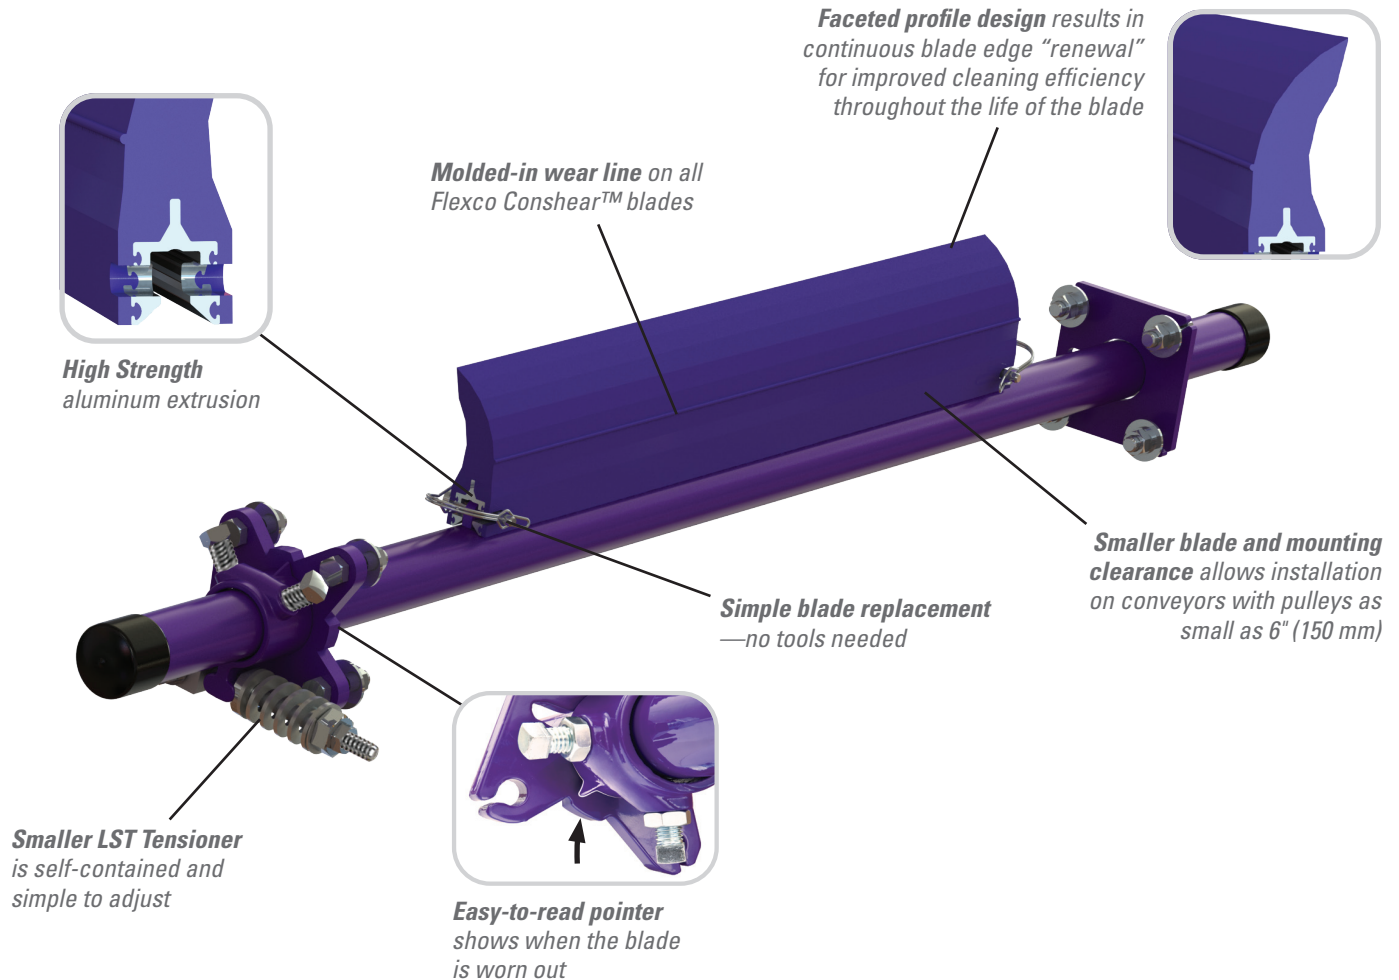

Features and Benefits

- **Quick-change blade.** No tools are needed. Just pull one pin, remove the old blade, slide in the new one and replace the pin.
- **Can be used on reversing belts.** Installing cleaners on both pulleys gives superior cleaning results on belts that run in both directions.
- **Can be ordered for special configurations.** Special order options include: a stainless steel pole for corrosive applications or a high-temp Conshear™-LS Blade for applications with temperatures up to 275°F (135°C) with spikes to 325°F (163°C).
- **Blade can be used on other cleaners.** The Conshear™-LS Blade can be used as a replacement blade on other OEM cleaners.

EZP-LS

Limited Space Precleaner

Specifications and Guidelines

Maximum Belt Speed

500 FPM (2.5 m/s)

Temperature Rating

-30 to 180°F (-35 to 82°C)

Minimum Pulley Diameter

6" (150 mm)

Blade Height

4-1/2" (115 mm)

Usable Blade Wear Length

2-3/8" (60 mm)

Blade Material

Polyurethane 83 durometer
(proprietary blend for abrasion resistance and long wear)

CEMA Cleaner Rating

Class 2

Available for Belt Widths

12 to 60" (300 to 1500 mm)

Horizontal Clearance Required

3" (75 mm)

Vertical Clearance Required


6-1/2" (165 mm)

Pole Length

Cleaner size up to 42" (1050 mm) + 30" (750 mm)
Cleaner size 48" (1200 mm) and up + 34" (850 mm)

Maximum Conveyor Span

Cleaner size up to 42" (1050 mm) + 25" (625 mm)
Cleaner size 48" (1200 mm) and up + 29" (725 mm)

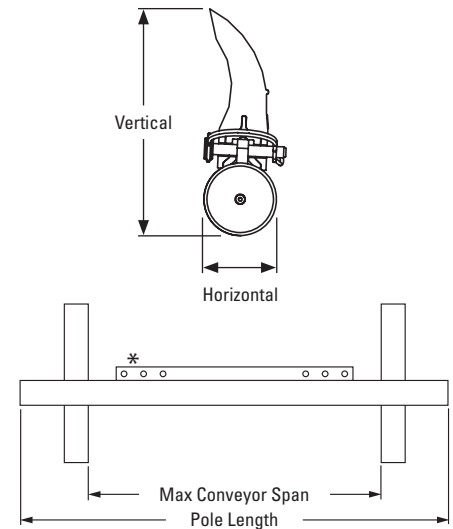

Ordering Information

EZP-LS – Belth Width Minus 2" (50 mm)					
Belt Width		Blade Width		Ordering Number	Item Code
in.	mm	in.	mm		
12	300	10	250	EZP-LS212	77127
18	450	16	400	EZP-LS218	77128
24	600	22	550	EZP-LS224	77129
30	750	28	700	EZP-LS230	77130
36	900	34	850	EZP-LS236	77131
42	1050	40	1000	EZP-LS242	77132
48	1200	46	1150	EZP-LS248	77133
54	1350	52	1300	EZP-LS254	77134
60	1500	58	1450	EZP-LS260	77135

Lead time: 1 working day

EZP-LS – Belth Width Minus 8" (200 mm)					
Belt Width		Blade Width		Ordering Number	Item Code
in.	mm	in.	mm		
18	450	10	250	EZP-LS818	77136
24	600	16	400	EZP-LS824	77137
30	750	22	550	EZP-LS830	77138
36	900	28	700	EZP-LS836	77139
42	1050	34	850	EZP-LS842	77140
48	1200	40	1000	EZP-LS848	77141
54	1350	46	1150	EZP-LS854	77142
60	1500	52	1300	EZP-LS860	77143


Lead time: 1 working day

ConShear™-LS Replacement Blades			
Blade Width		Ordering Number	Item Code
in.	mm		
10	250	CRB-LS10	77088
16	400	CRB-LS16	77089
22	550	CRB-LS22	77090
28	700	CRB-LS28	77091
34	850	CRB-LS34	77092
40	1000	CRB-LS40	77093
46	1150	CRB-LS46	77094
52	1300	CRB-LS52	77095
58	1450	CRB-LS58	77096

Other blade sizes available upon request.

Lead time: 1 working day

Pole Location Specs

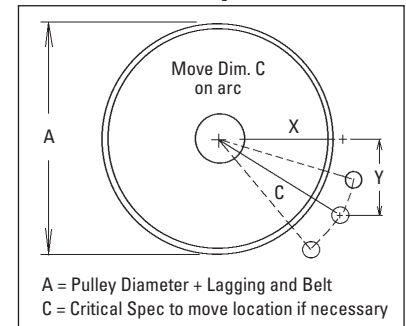

Pole Location Chart

A		X		Y		C	
in.	mm	in.	mm	in.	mm	in.	mm
6	150	2 5/8	65	5 1/2	140	6 1/8	150
7	175	3 1/4	81	5 1/2	140	6 3/8	155
8	200	3 7/8	96	5 1/2	140	6 3/4	162
9	225	4 3/8	109	5 1/2	140	7	171
10	250	5	125	5 1/2	140	7 3/8	179
11	275	5 1/2	138	5 1/2	140	7 3/4	189
12	300	6 1/8	153	5 1/2	140	8 1/4	198
13	325	6 5/8	166	5 1/2	140	8 5/8	209
14	350	7 1/8	178	5 1/2	140	9	219
15	375	7 5/8	191	5 1/2	140	9 3/8	229
16	400	8 1/4	206	5 1/2	140	9 7/8	239
17	425	8 3/4	219	5 1/2	140	10 3/8	252
18	450	9 1/4	231	5 1/2	140	10 3/4	263
19	475	9 3/4	244	5 1/2	140	11 1/4	273
20	500	10 1/4	256	5 1/2	140	11 5/8	284
21	525	10 3/4	269	5 1/2	140	12 1/8	295
22	550	11 1/4	281	5 1/2	140	12 1/2	307