


MHP Precleaner

Installation, Operation and Maintenance Manual

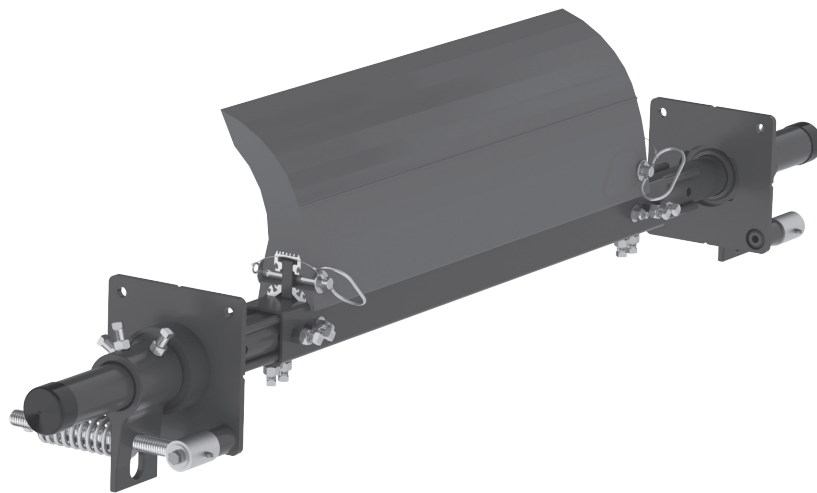

MHP Precleaner

Serial Number: _____

Purchase Date: _____

Purchased From: _____

Installation Date: _____

Serial number information can be found on the Serial Number Label included in the Information Packet found in the cleaner carton.

This information will be helpful for any future inquiries or questions about belt cleaner replacement parts, specifications or troubleshooting.

Table of Contents

Section 1 – Important Information	2
1.1 General Introduction	2
1.2 User Benefits	2
1.3 Service Option	2
Section 2 – Safety Considerations and Precautions	3
2.1 Stationary Conveyors.....	3
2.2 Operating Conveyors	3
Section 3 – Pre-Installation Checks and Options.....	4
3.1 Checklist	4
3.2 Cleaner Location Adjustments	5
3.3 Optional Installation Accessories.....	6
Section 4 – Installation Instructions.....	7
Section 5 – Pre-Operation Checklist and Testing.....	11
5.1 Pre-Op Checklist	11
5.2 Test Run the Conveyor	11
Section 6 – Maintenance	12
6.1 New Installation Inspection	12
6.2 Routine Visual Inspection	12
6.3 Routine Physical Inspection.....	12
6.4 Blade Replacement Instructions.....	13
6.5 Maintenance Log.....	15
6.6 Cleaner Maintenance Checklist.....	16
Section 7 – Troubleshooting	17
Section 8 – Specs and CAD Drawings.....	18
8.1 Specifications and Guidelines - MHP	18
8.2 Specifications and Guidelines - MHP UG	19
8.3 CAD Drawing - MHP - PST2.....	20
8.4 CAD Drawings - MHP - PAT	21
8.5 CAD Drawing - MHP UG - PST2.....	22
8.6 CAD Drawings - MHP UG - PAT	23
Section 9 – Replacement Parts	24
9.1 Replacement Parts List - MHP	24
9.2 Replacement Parts List - MHP UG	25
Section 10 – Other Flexco Conveyor Products.....	27

Section 1 – Important Information

1.1 General Introduction

We at Flexco are very pleased that you have selected an MHP Precleaner for your conveyor system.

This manual will help you to understand the operation of this product and assist you in making it work up to its maximum efficiency over its lifetime of service.

It is essential for safe and efficient operation that the information and guidelines presented be properly understood and implemented. This manual will provide safety precautions, installation instructions, maintenance procedures and troubleshooting tips.

If, however, you have any questions or problems that are not covered, please contact your field representative or our Customer Service Department.

Visit www.flexco.com for other Flexco locations and products.

Please read this manual thoroughly and pass it on to any others who will be directly responsible for installation, operation and maintenance of this cleaner. While we have tried to make the installation and service tasks as easy and simple as possible, **it does however require correct installation and regular inspections and adjustments to maintain top working condition.**

1.2 User Benefits

Correct installation and regular maintenance will provide the following benefits for your operation:

- Reduced conveyor downtime.
- Reduced man-hour labor.
- Lower maintenance budget costs.
- Increased service life for the belt cleaner and other conveyor components.

1.3 Service Option

The MHP Precleaner is designed to be easily installed and serviced by your on-site personnel. However, if you would prefer complete turn-key factory service, please contact your local Flexco field representative.

Section 2 – Safety Considerations and Precautions

Before installing and operating the MHP Precleaner, it is important to review and understand the following safety information.

There are set-up, maintenance and operational activities involving both **stationary** and **operating** conveyors. Each case has a safety protocol.

2.1 Stationary Conveyors

The following activities are performed on stationary conveyors:

- Installation
- Blade replacement
- Repairs
- Tension adjustments
- Cleaning

DANGER

It is imperative that OSHA/MSHA Lockout/Tagout (LOTO) regulations, 9 CFR 1910.147, be followed before undertaking the preceding activities. Failure to use LOTO exposes workers to uncontrolled behavior of the belt cleaner caused by movement of the conveyor belt. Severe injury or death can result.

Before working:

- Lockout/Tagout the conveyor power source.
- Disengage any takeups.
- Clear the conveyor belt or clamp securely in place.

WARNING

Use Personal Protective Equipment (PPE):

- Safety eyewear
- Hardhats
- Safety footwear

Close quarters, springs and heavy components create a worksite that compromises a worker's eyes, feet and skull.

PPE must be worn to control the foreseeable hazards associated with conveyor belt cleaners. Serious injuries can be avoided.

2.2 Operating Conveyors

There are two routine tasks that must be performed while the conveyor is running:

- Inspection of the cleaning performance.
- Dynamic troubleshooting.

DANGER

Every belt cleaner is an in-running nip hazard. Never touch or prod an operating cleaner. Cleaner hazards cause instantaneous amputation and entrapment.

WARNING

Belt cleaners can become projectile hazards. Stay as far from the cleaner as practical and use safety eyewear and headgear. Missiles can inflict serious injury.

WARNING

Never adjust anything on an operating cleaner. Unforseeable belt projections and tears can catch on cleaners and cause violent movements of the cleaner structure. Flailing hardware can cause serious injury or death.

Section 3 – Pre-Installation Checks and Options

3.1 Checklist

- Check that the cleaner size is correct for the beltline width.
- Check the belt cleaner carton and make sure all the parts are included.
- Review the “Tools Needed” list on the top of the installation instructions.
- Check the conveyor site:
 - Will the cleaner be installed on a chute?
 - Are there obstructions that may require cleaner location adjustments?
(see 3.2 - Cleaner Location Adjustment)
 - Is the install on an open head pulley requiring mounting structure?
(see 3.3 - Optional Installation Accessories)

Section 3 – Pre-Installation Checks and Options

3.2 Cleaner Location Adjustments

In certain applications it is necessary to modify the location of the precleaner pole due to permanent obstacles that obstruct the desired location. Relocating the pole location can be done easily and does not hinder the performance of the cleaner as long as the “C” dimension is maintained.

NOTE: In the following example we will be lowering the pole location in the “Y” direction, but the same method could also be applied in the “X” direction.


Conveyor situation:

Pulley Diameter: 12" (300mm)

X=6 1/8" (155mm)

Y=5 1/2" (140mm)

C=8 1/4" (210mm)

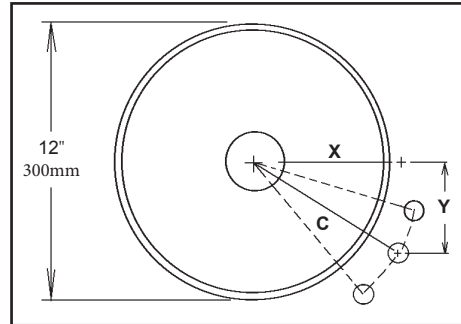

- Determine the given location dimensions and define the change needed.** After laying out the given X & Y dimensions, determine the distance of the modification required for adequate clearance of the pole and tensioning system. (In the example we decide to lower the pole 2" (50 mm) to clear the support structure).
- Write down known dimensions.** We can now determine two of the three required dimensions which will allow us to find the third. We know we cannot alter the “C” dimension, so this will remain the same. Also we are required to lower the unit in the “Y” dimension 2" (50 mm), so we add 2" (50 mm) to the given “Y” dimension.

X = ?"

Y = 5 1/2 + 2 = 7 1/2" (140mm + 50mm = 190mm)

C = 8 1/4" (210mm)

- Determine final dimension.** On a flat vertical surface, using a level, draw one horizontal line and one vertical line, creating a right triangle (Fig 3a). Measure down from the intersection the determined “Y” dimension and mark (Fig 3b). With the tape measure starting at the modified “Y” mark, swing the tape across the “X” line and mark at the “C” dimension where it crosses the “X” line (Fig 3c). Measure from the intersection to the “C” intersection and this will be your new “X” dimension (Fig. 3d).

X = 3 1/2" (89mm)

Y = 7 1/2" (190mm)

C = 8 1/4" (210mm)




Fig. 3a




Fig. 3b




Fig. 3c




Fig. 3d

Section 3 - Pre-Installation Checks and Options

3.3 Optional Installation Accessories

Versatile, adjustable brackets and plates that can be mounted on the conveyor structure so precleaners and secondary cleaners can be easily and quickly bolted into place.




Optional Mounting Bar Kit
(with bolts, nuts and washers)
(Item Code: 75830)

- For mounting precleaners on open head pulleys.
- Weld on both sides of pulley and bolt on steel plates.
- 1-1/2 x 16" (38 x 400mm) with (4) 5/8" (16mm) tapped holes



Mounting Plate Kit (incl. 2 plates)
(Item Code: 76537)

- For use with Mounting Bars to mount cleaners on open head pulleys.
- 16 x 32" (400 x 800mm) with (4) 5/8" (16mm) holes



Pole Extender Kit
(incl. 2 pole extenders)
(Item Code: 76024)

- For cleaner sizes 72" (1800mm) and larger
- Provides 30" (750mm) of extended pole length



Optional Mounting Kits (includes 2 brackets/bars)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS
Optional Mounting Bar Kit *	MMBK	75830	19.5
Mounting Plate Kit (incl. 2 plates)	MMPK	76537	140.0
Pole Extender Kit	MAPEK	76024	21.9

*Hardware Included
Lead time: 1 working day

Section 4 – Installation Instructions

4.1 MHP Precleaner

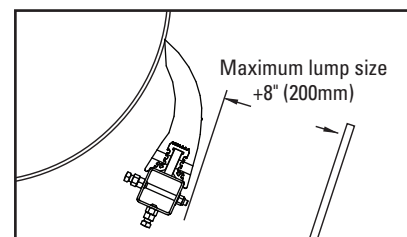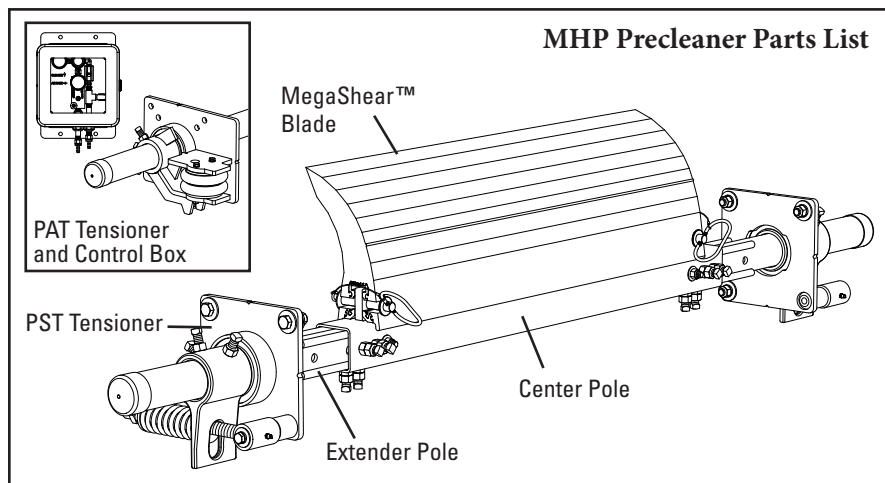

Tools Needed:


- Tape Measure
- Wrenches or Crescent Wrenches: (2) 3/4" (19mm), (2) 1-1/2" (38mm), (1) 15/16" (24mm), and (1) 5/8" (16mm)
- Level
- Marking pen or soapstone
- C-clamps for AWT only

Physically lock out and tag the conveyor at the power source before you begin cleaner installation.

CAUTION: Components may be heavy. Use safety-approved lifting procedures.

1. **Find the X, Y & C specifications.** Measure the pulley diameter (including the belt and the lagging) (Fig. 1).
Pulley Diameter _____"; X=_____"; Y=_____"; C=_____".

(Adjustments can be made to the X & Y coordinates to move away from obstacles as long as the C dimension remains constant.)

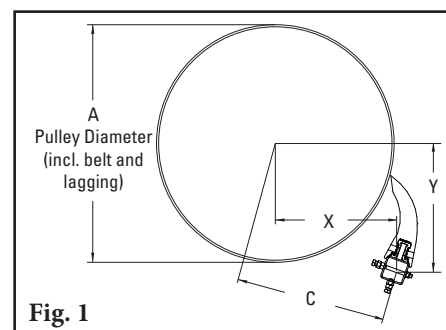

X & Y Chart for Pole Location

A		X		Y		C	
in	mm	in	mm	in	mm	in	mm
20	500	10	250	14 3/8	365	17 1/2	442
21	525	10 1/2	263	14 3/8	365	17 3/4	450
22	550	11	275	14 3/8	365	18 1/8	457
23	575	11 1/2	288	14 3/8	365	18 3/8	465
24	600	12	300	14 3/8	365	18 3/4	472
25	625	12 1/2	313	14 3/8	365	19	480
26	650	13	325	14 3/8	365	19 3/8	489
27	675	13 1/2	338	14 3/8	365	19 3/4	497
28	700	14	350	14 3/8	365	20 1/8	506
29	725	14 1/2	363	14 3/8	365	20 3/8	514
30	750	15	375	14 3/8	365	20 3/4	523
31	775	15 1/2	388	14 3/8	365	21 1/8	532
32	800	16	400	14 3/8	365	21 1/2	542
33	825	16 1/2	413	14 3/8	365	21 7/8	551
34	850	17	425	14 3/8	365	22 1/4	560
35	875	17 1/2	438	14 3/8	365	22 5/8	570
36	900	18	450	14 3/8	365	23	579
37	925	18 1/2	463	14 3/8	365	23 3/8	589
38	950	19	475	14 3/8	365	23 7/8	599
39	975	19 1/2	488	14 3/8	365	24 1/4	609
40	1000	20	500	14 3/8	365	24 5/8	619
41	1025	20 1/2	513	14 3/8	365	25	629
42	1050	21	525	14 3/8	365	25 1/2	639
43	1075	21 1/2	538	14 3/8	365	25 7/8	650
44	1100	22 1/4	550	14 3/8	365	26 1/2	660

X & Y Chart for Pole Location

A		X		Y		C	
in	mm	in	mm	in	mm	in	mm
45	1125	22 7/8	563	14 3/8	365	27	671
46	1150	23 1/2	575	14 3/8	365	27 1/2	681
47	1175	24	588	14 3/8	365	28	692
48	1200	24 5/8	600	14 3/8	365	28 1/2	702
49	1225	25 1/8	613	14 3/8	365	29	714
50	1250	25 3/4	628	14 3/8	365	29 1/2	727
51	1275	26 3/8	641	14 3/8	365	30	738
52	1300	26 7/8	657	14 3/8	365	30 1/2	752
53	1325	27 1/2	672	14 3/8	365	31	765
54	1350	28	685	14 3/8	365	31 1/2	776
55	1375	28 5/8	700	14 3/8	365	32	790
56	1400	29 1/8	713	14 3/8	365	32 1/2	801
57	1425	29 3/4	728	14 3/8	365	33	815
58	1450	30 1/4	741	14 3/8	365	33 1/2	826
59	1475	30 3/4	757	14 3/8	365	34	840
60	1500	31 3/8	769	14 3/8	365	34 1/2	851
61	1525	31 7/8	782	14 3/8	365	35	863
62	1550	32 1/2	797	14 3/8	365	35 1/2	877
63	1575	33	810	14 3/8	365	36	888
64	1600	33 1/2	826	14 3/8	365	36 1/2	903
65	1625	34 1/8	838	14 3/8	365	37	914
66	1650	34 5/8	850	14 3/8	365	37 1/2	925
67	1675	35 1/8	866	14 3/8	365	38	940
68	1700	35 3/4	879	14 3/8	365	38 1/2	951
69	1725	36 1/4	891	14 3/8	365	39	963


X & Y Chart for Pole Location

A		X		Y		C	
in	mm	in	mm	in	mm	in	mm
70	1750	36 3/4	906	14 3/8	365	39 1/2	977
71	1775	37 3/8	919	14 3/8	365	40	989
72	1800	37 7/8	932	14 3/8	365	40 1/2	1001
73	1825	38 3/8	947	14 3/8	365	41	1015
74	1850	38 7/8	960	14 3/8	365	41 1/2	1027
75	1875	39 1/2	972	14 3/8	365	42	1039
76	1900	40	985	14 3/8	365	42 1/2	1050
77	1925	40 1/2	1000	14 3/8	365	43	1064
78	1950	41	1013	14 3/8	365	43 1/2	1077
79	1975	41 5/8	1026	14 3/8	365	44	1089
80	2000	42 1/8	1038	14 3/8	365	44 1/2	1100
81	2025	42 5/8	1053	14 3/8	365	45	1114
82	2050	43 1/8	1066	14 3/8	365	45 1/2	1127
83	2075	43 3/4	1079	14 3/8	365	46	1139
84	2100	44 1/4	1090	14 3/8	365	46 1/2	1150


Section 4 – Installation Instructions

4.1 MHP Precleaner


2. **Lay out the dimensions on the chute wall.** Measure out the X dimension horizontally from the center of the pulley shaft and mark. (**NOTE:** It may be easier to put a level on top of the pulley shaft, draw a horizontal line and then measure down half the diameter of the shaft and make a line from the front of the shaft. Now subtract half the pulley shaft diameter from the X coordinate and measure on the line and make a mark.) Then measure down vertically the Y dimension and mark. This is the correct position for the center of the cleaner pole (Fig. 2). Lay out and mark the same dimensions on the other side.

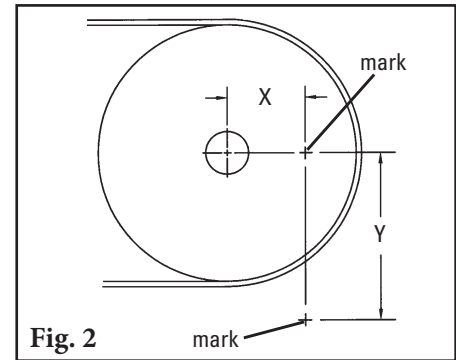

3. **Mark and cut the mounting base holes.** Using the mounting base template provided in the instruction packet, position the large pole hole of the template on the chute with the hole notches aligned with the layout lines. Trace the pole hole and mounting holes (Fig. 3). Each base can be mounted in any position 360° around the pole as long as the pole's center point does not change. Cut the holes on both sides of the chute.

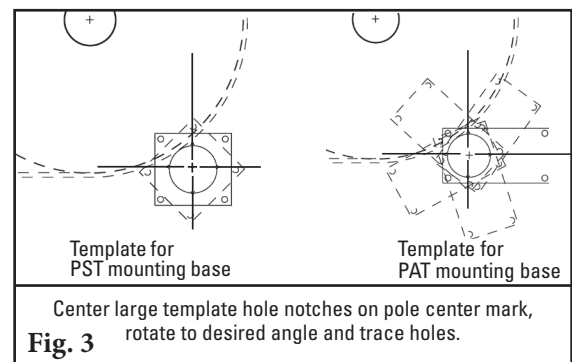



4. **Assemble the extender poles to the center pole.** Insert the extender poles through the chute holes and into the center pole and make sure the locating bolt holes align with the center pole holes. Position the center pole with the welded nuts and locking bolts on one side facing down and on the adjoining side facing away from the head pulley (Fig. 4). Leave the locking bolts loose.

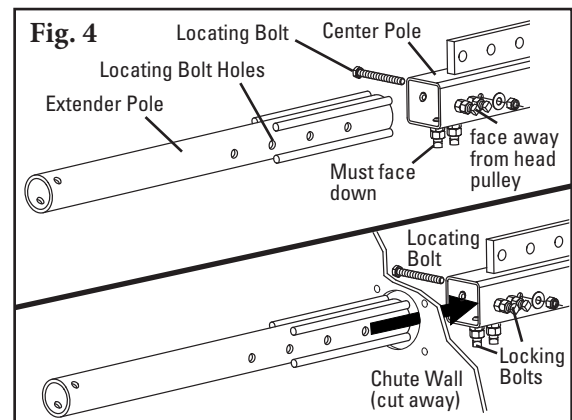

5. **Install the mounting bases.** Bolt the mounting bases to the chute with the bolts provided (Fig. 5). Position pivot shaft in desired orientation (see Step 9S).


6. **Install the blade.** Place the blade onto the center pole plate. Adjust the extender poles until the holes align with the holes in the center pole and lock the blade into place with the two blade pins and cotter pins (Fig. 6).

NOTE: Be sure at least 6" (150 mm) of the extender pole extends out of the mounting base on each side for tensioner installation. Adjust the extender poles in the center pole if more or less length is needed.

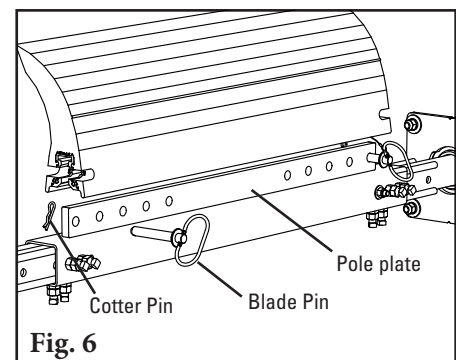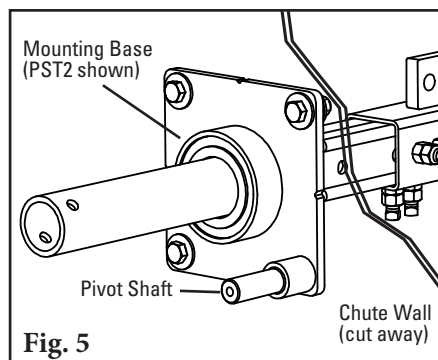

Section 4 – Installation Instructions

4.1 MHP Precleaner

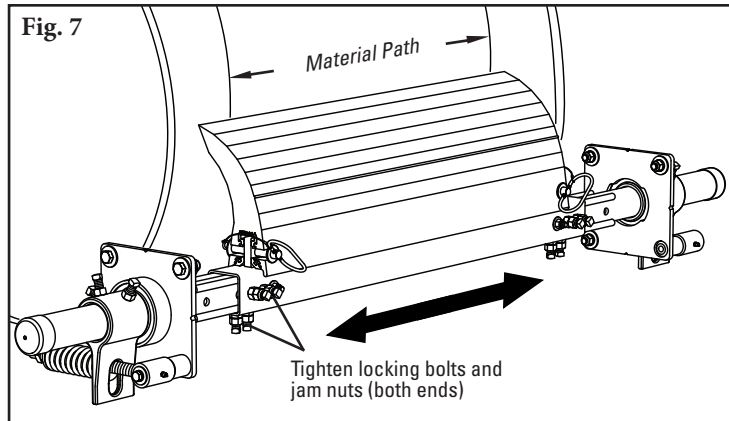

7. **Center the blade on the belt.** Slide the pole until the blade is centered or cover the belt's material path (Fig. 7). **NOTE:** Standard blade coverage is belt width minus 6" (150 mm). If less blade coverage is required, other material path options are available for replacement.
8. **Lock the extender poles in the center pole.** Tighten the two locking bolts and jam nuts on each end of the center pole (Fig. 7).

Install the tensioning system. For the PST2 Spring Tensioner go to step 9S. For the PAT Tensioner proceed to step 9A.

Precleaner Spring Tensioner (PST2)

9S. Determine spring orientation. Remove the adjusting nuts and springs from the rods. Rotate mounting base until pivot rod is in desired orientation to clear structure and obstacles (Fig. 9S). Tighten all mounting bolts including pivot mounting bolt.

10S. Slide the torque arm onto the pole end.

Temporarily remove torque pivot rod. Insert through torque arm slot. Flat face of the torque arm should face away from pivot point. Ensuring the correct pulling rotation, slide the torque arm onto the pole end (Fig. 10S). Slide torque pivot rod over pivot shaft and reinstall bolt.

11S. Reassemble the spring assembly. Slide the spring, washer and bushings onto the pivot rod and turn the two adjusting nuts so about 1/4" (6 mm) of the rod is exposed above the nuts (Fig. 11S). Complete steps 9S through 11S on the other side.

12S. Tension the blade to the belt. Rotate the blade up until it contacts the belt. While holding the spring bushing flat on the torque arm, rotate the torque arm until the pivot rod is against the end of the slot nearest the pole. Tighten the locking bolts and jam nuts on the torque arm (Fig. 12S).

NOTE: The torque arm should be up against the mounting base.

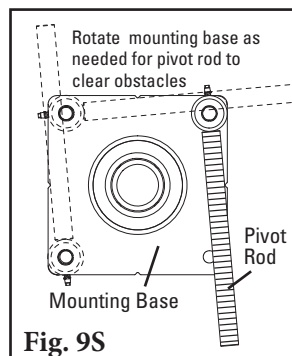


Fig. 9S

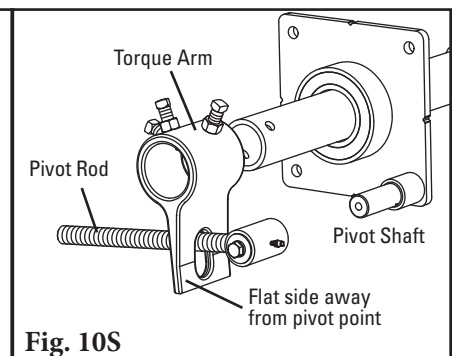


Fig. 10S

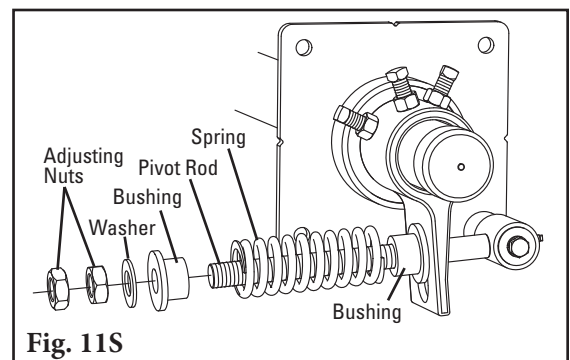


Fig. 11S

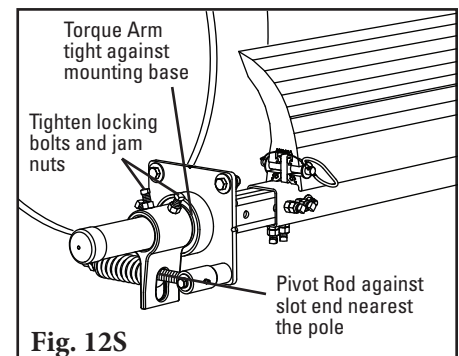


Fig. 12S

Section 4 – Installation Instructions

4.1 MHP Precleaner


13S. Set the correct blade tension. Refer to the chart or the decal on the mounting base for the spring length required for the belt width. Lightly pull the pivot rod toward the end of the torque arm slot nearest the pole and turn the adjusting nuts until the required spring length is achieved. Complete steps 12S and 13S on the other side. For best results, recheck the spring length on the first side to insure there has been no movement.

14S. Test run the cleaner. Run the conveyor for at least 15 minutes and inspect cleaning performance. Check the spring lengths for proper tensioning. Make adjustments as necessary.

PST Spring Length Chart

Blade Width		White Springs		Silver Springs		Red Springs	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	5 5/8	143	N/A	N/A	N/A	N/A
24	600	5 3/8	137	6 1/4	159	N/A	N/A
30	750	5	127	6 1/8	156	6 1/4	159
36	900	4 3/4	121	6	152	6 1/4	159
42	1050	N/A	N/A	6	152	6 1/8	156
48	1200	N/A	N/A	5 7/8	149	6 1/8	156
54	1350	N/A	N/A	5 3/4	146	6	152
60	1500	N/A	N/A	5 5/8	143	6	152
66	1650	N/A	N/A	5 5/8	143	5 7/8	149
72	1800	N/A	N/A	5 1/2	140	5 7/8	149
78	1950	N/A	N/A	5 3/8	137	5 3/4	146
84	2100	N/A	N/A	N/A	N/A	5 3/4	146
90	2250	N/A	N/A	N/A	N/A	5 5/8	143
96	2400	N/A	N/A	N/A	N/A	5 5/8	143
102	2550	N/A	N/A	N/A	N/A	5 1/2	140
108	2700	N/A	N/A	N/A	N/A	5 1/2	140
114	2850	N/A	N/A	N/A	N/A	5 3/8	137

Shading indicates preferred spring option.



Pneumatic Air Tensioner (PAT)



NOTE: PAT Tensioners are shipped with the air bags and torque arms attached to the mounting bases.

9P. Tension the blade to the belt. Collapse both air bags (with C-clamps) and rotate the blade until it is 1" (25 mm) short of contact with the belt. Tighten the torque arm locking bolts and jam nuts (Fig. 9P). Remove C-clamps.

10P. Connect the supply lines and set tension pressure. With the parts supplied, attach a line to each air bag and run the lines to the outlet side of the PAT control box (Fig. 10P).

NOTE: Be sure lines are safely away from the belt. Connect a line from the inlet side of the box to the site's supply or air tank. Test the connections for leaks and set the pressure per the chart on the control box (also shown at left).

11P. Test run the cleaner. Run the conveyor for at least 15 minutes and inspect cleaning performance. Make adjustments as necessary.

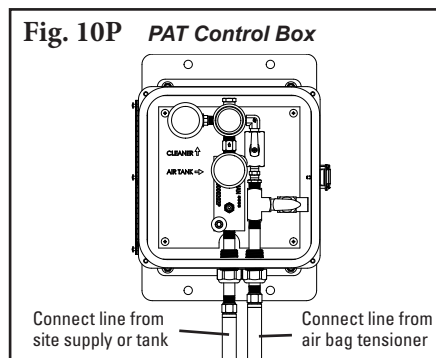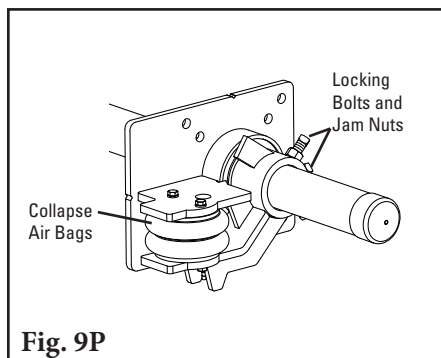

PAT Pressure Chart

Blade Width		Pressure	
in.	mm	psi	kPa
18	450	8	55
24	600	10	69
32	800	13	90
36	900	15	103
42	1050	18	124
48	1200	20	138
54	1350	23	159
60	1500	25	172
66	1650	28	193
72	1800	31	214
78	1950	33	228
84	2100	36	248
90	2250	38	262
96	2400	41	283
102	2550	43	296
108	2700	46	317
114	2850	48	331

Section 5 – Pre-Operation Checklist and Testing

5.1 Pre-Op Checklist

- Recheck that all fasteners are tightened properly.
- Add pole caps.
- Apply all supplied labels to the cleaner.
- Check the blade location on the belt.
- Be sure that all installation materials and tools have been removed from the belt and the conveyor area.
- Re-check tension settings.

5.2 Test Run the Conveyor

- Run the conveyor for at least 15 minutes and inspect the cleaning performance.
- Check the tensioner spring for recommended length (proper tensioning).
- Make adjustments as necessary.

NOTE: Observing the cleaner when it is running and performing properly will help to detect problems or when adjustments are needed later.

Section 6 – Maintenance

Flexco belt cleaners are designed to operate with minimum maintenance. However, to maintain superior performance some service is required. When the cleaner is installed a regular maintenance program should be set up. This program will ensure that the cleaner operates at optimal efficiency and problems can be identified and fixed before the cleaner stops working.

All safety procedures for inspection of equipment (stationary or operating) must be observed. The MHP Precleaner operates at the discharge end of the conveyor and is in direct contact with the moving belt. Only visual observations can be made while the belt is running. Service tasks can be done only with the conveyor stopped and by observing the correct lockout/tagout procedures.

6.1 New Installation Inspection

After the new cleaner has run for a few days a visual inspection should be made to ensure the cleaner is performing properly. Make adjustments as needed.

6.2 Routine Visual Inspection (every 2-4 weeks)

A visual inspection of the cleaner and belt can determine:

- If the spring length is the correct length for optimal tensioning.
- If the belt looks clean or if there are areas that are dirty.
- If the blade is worn out and needs to be replaced.
- If there is damage to the blade or other cleaner components.
- If fugitive material is built up on the cleaner or in the transfer area.
- If there is cover damage to the belt.
- If there is vibration or bouncing of the cleaner on the belt.
- If a snub pulley is used, a check should be made for material buildup on the pulley.

If any of the above conditions exist, a determination should be made on when the conveyor can be stopped for cleaner maintenance.



6.3 Routine Physical Inspection (every 6-8 weeks)

When the conveyor is not in operation and properly locked and tagged out a physical inspection of the cleaner to perform the following tasks:

- Clean material buildup off of the cleaner blade and pole.
- Closely inspect the blade for wear and any damage. Replace if needed.
- Ensure full blade to belt contact.
- Inspect the cleaner pole for damage.
- Inspect all fasteners for tightness and wear. Tighten or replace as needed.
- Replace any worn or damaged components.
- Check the tension/pressure of the cleaner blade to the belt. Adjust the tension if necessary using the chart on the cleaner or the ones on Page 10.
- When maintenance tasks are completed, test run the conveyor to ensure the cleaner is performing properly.

Section 6 – Maintenance

6.4 Blade Replacement Instructions

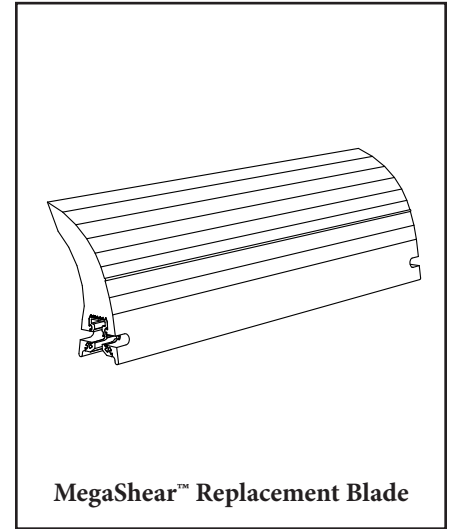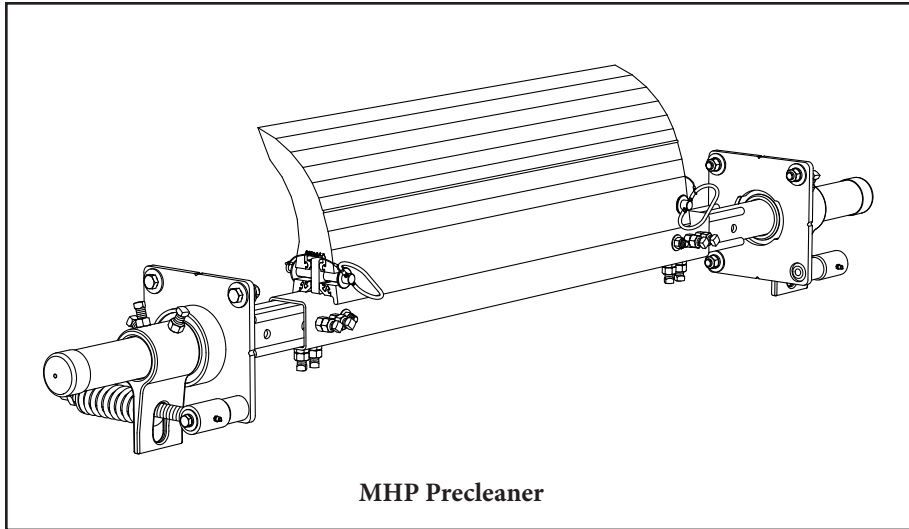



Physically lock out and tag the conveyor at the power source before you begin cleaner installation.

Tools Needed:

- Tape Measure
- Hammer
- Screwdriver
- Pry Bar
- Wire Brush (for cleaning pole)
- Small Putty Knife (for cleaning pole)

1. **Remove the tension.** Loosen the adjusting nuts on both sides and turn them out until they are flush with ends of the pivot arm (Fig. 1) or release pressure from PAT control box. This releases the tension of the blade on the belt.
2. **Remove the worn blade.** Remove blade pin on each end of blade and remove the blade from the pole (Fig. 2). Clean all fugitive material from the pole.

NOTE: If blade is hard to remove use a screwdriver or hammer to loosen it and then remove.

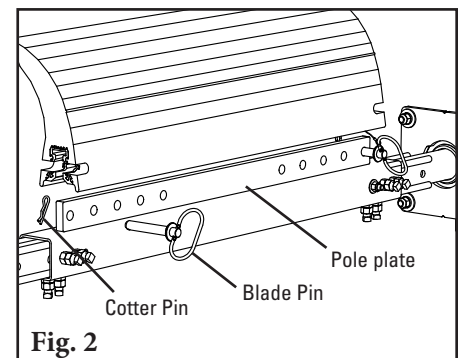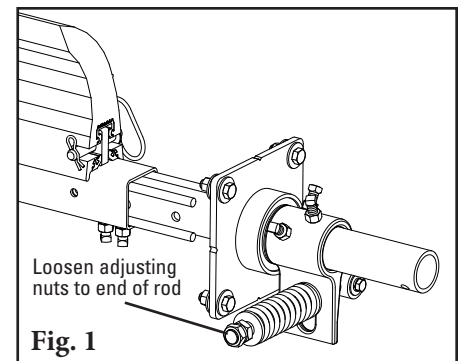


Section 6 – Maintenance

6.4 Blade Replacement Instructions

3. **Install the new blade.** Seat the new blade onto the pole plate. Align holes on pole and blade, then install blade pins to lock in place (Fig. 3).
4. **Reset the correct blade tension.** Refer to the charts below for the spring length or PSI required for the belt width. For PST lightly pull the pivot arm toward the end of the torque arm slot nearest the pole and turn the adjusting nuts until the required spring length is achieved. Tighten jam nut.

Test run the cleaner. Run the conveyor for at least 15 minutes and inspect the cleaning performance. Check the spring length for proper tensioning. Make adjustments as necessary.

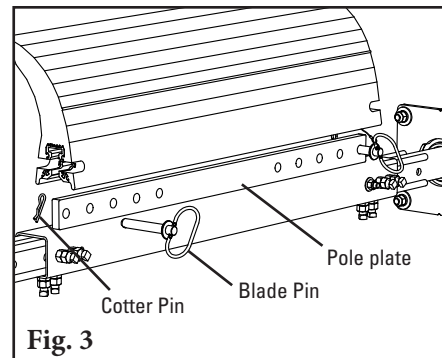


PST Spring Length Chart

Blade Width		White Springs		Silver Springs		Red Springs	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	5 5/8	143	N/A	N/A	N/A	N/A
24	600	5 3/8	137	6 1/4	159	N/A	N/A
30	750	5	127	6 1/8	156	6 1/4	159
36	900	4 3/4	121	6	152	6 1/4	159
42	1050	N/A	N/A	6	152	6 1/8	156
48	1200	N/A	N/A	5 7/8	149	6 1/8	156
54	1350	N/A	N/A	5 3/4	146	6	152
60	1500	N/A	N/A	5 5/8	143	6	152
66	1650	N/A	N/A	5 5/8	143	5 7/8	149
72	1800	N/A	N/A	5 1/2	140	5 7/8	149
78	1950	N/A	N/A	5 3/8	137	5 3/4	146
84	2100	N/A	N/A	N/A	N/A	5 3/4	146
90	2250	N/A	N/A	N/A	N/A	5 5/8	143
96	2400	N/A	N/A	N/A	N/A	5 5/8	143
102	2550	N/A	N/A	N/A	N/A	5 1/2	140
108	2700	N/A	N/A	N/A	N/A	5 1/2	140
114	2850	N/A	N/A	N/A	N/A	5 3/8	137

Shading indicates preferred spring option.

PAT Pressure Chart

Blade Width		Pressure	
in.	mm	psi	kPa
18	450	8	55
24	600	10	69
32	800	13	90
36	900	15	103
42	1050	18	124
48	1200	20	138
54	1350	23	159
60	1500	25	172
66	1650	28	193
72	1800	31	214
78	1950	33	228
84	2100	36	248
90	2250	38	262
96	2400	41	283
102	2550	43	296
108	2700	46	317
114	2850	48	331



Section 6 – Maintenance

6.5 Maintenance Log

Conveyor Name/No. _____

Date: _____

Work done by: _____

Service Quote # _____

Activity: _____

Date: _____

Work done by: _____

Service Quote # _____

Activity: _____

Date: _____

Work done by: _____

Service Quote # _____

Activity: _____

Date: _____

Work done by: _____

Service Quote # _____

Activity: _____

Date: _____

Work done by: _____

Service Quote # _____

Activity: _____

Date: _____

Work done by: _____

Service Quote # _____

Activity: _____

Date: _____

Work done by: _____

Service Quote # _____

Activity: _____

Section 6 – Maintenance

6.6 Cleaner Maintenance Checklist

Site: _____ Inspected by: _____ Date: _____

Belt Cleaner: _____ Serial Number: _____

Beltline Information:

Beltline Number: _____ Belt Condition: _____

Belt ☐ 18" ☐ 24" ☐ 30" ☐ 36" ☐ 42" ☐ 48" ☐ 54" ☐ 60" ☐ 72" ☐ 84" ☐ 96" ☐ 108" ☐ 120"
Width: (450mm) (600mm) (750mm) (900mm) (1050mm) (1200mm) (1350mm) (1500mm) (1800mm) (2100mm) (2400mm) (2700mm) (3000mm)

Head Pulley Diameter (Belt & Lagging): _____ Belt Speed: _____ fpm Belt Thickness: _____

Belt Splice: _____ Condition of Splice: _____ Number of Splices: _____ ☐ Skived ☐ Unskived

Material conveyed: _____

Days per week run: _____ Hours per day run: _____

Blade Life:

Date blade installed: _____ Date blade inspected: _____ Estimated blade life: _____

Is blade making complete contact with belt? ☐ Yes ☐ No

Blade wear: Left _____ Middle _____ Right _____

Blade condition: ☐ Good ☐ Grooved ☐ Smiled ☐ Not contacting belt ☐ Damaged

Measurement of spring: Required _____ Currently _____

For PAT Tensioner only: Air/Nitrogen Pressure Required _____ Currently _____

Inspect air bags and lines

Was Cleaner Adjusted: ☐ Yes ☐ No

Pole Condition: ☐ Good ☐ Bent ☐ Worn

Lagging: ☐ Side Lag ☐ Ceramic ☐ Rubber ☐ Other ☐ None

Condition of lagging: ☐ Good ☐ Bad ☐ Other _____

Cleaner's Overall Performance: (Rate the following 1 - 5, 1= very poor - 5 = very good)

Appearance: ☐: Comments: _____

Location: ☐: Comments: _____

Maintenance: ☐: Comments: _____

Performance: ☐: Comments: _____

Other comments: _____

Section 7 – Troubleshooting

Problem	Possible Cause	Possible Solutions
Poor cleaning performance	Cleaner under-tensioned	Adjust to correct tension – see spring length/PSI chart
	Cleaner over-tensioned	Adjust to correct tension – see spring length/PSI chart
	Cleaner installed in wrong location	Verify "C" dimension, relocate to correct dimension
	Cleaner blade worn or damaged	Replace cleaner blade
Rapid Blade Wear	Tension on cleaner too high/low	Adjust to correct tension – see spring length/PSI chart
	Cleaner not located correctly	Check cleaner location for correct dimensions
	Blade attack angle incorrect	Check cleaner location for correct dimensions
	Material too abrasive for blade	Option: switch to alternate cleaner with metal blades
	Mechanical splice damaging blade	Repair, skive or replace splice
Center wear on blade (smile effect)	Blade wider than material path	Replace blade with width to match material path
	Tension on cleaner too high/low	Adjust to correct tension – see spring length/PSI chart
	Material very thick and wet	Increase tension (consult factory)
Unusual wear or damage to blade	Mechanical splice damaging blade	Repair, skive or replace splice
	Belt damaged or ripped	Repair or replace belt
	Cleaner not correctly located	Verify "C" dimension, relocate to correct dimension
	Damage to pulley or pulley lagging	Repair or replace pulley
Vibration or noise	Cleaner not located correctly	Verify "C" dimension, relocate to correct dimension
	Blade attack angle incorrect	Verify "C" dimension, relocate to correct dimension
	Cleaner running on empty belt	Use a spray pole when the belt is empty
	Cleaner tension too high/low	Adjust to correct tension or slight adjust to diminish
	Cleaner locking bolts not secure	Check and tighten all bolts and nuts
	Cleaner not square to head pulley	Verify "C" dimension, relocate to correct dimension
	Material buildup in chute	Clean up build-up on cleaner and in chute
Cleaner being pushed away from pulley	Cleaner tension not set correctly	Ensure correct tension/increase tension slightly
	Sticky material is overburdening cleaner	Increase tension; replace with cleaner with metal tips; replace with larger size cleaner
	Cleaner not set up correctly	Confirm location dimensions are equal on both sides


Section 8 – Specs and CAD Drawings

8.1 Specifications & Guidelines - MHP

Pole Length Specifications*

CLEANER SIZE		MAX OVERALL POLE LENGTH		CENTER POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
24	600	78	1950	24	600	66	1650
30	750	84	2100	30	750	72	1800
36	900	90	2250	36	900	78	1950
42	1050	96	2400	42	1050	84	2100
48	1200	102	2550	48	1200	90	2250
54	1350	108	2700	54	1350	96	2400
60	1500	114	2850	60	1500	102	2550
72	1800	126	3150	72	1800	114	2850
84	2100	138	3450	84	2100	126	3150
96	2400	150	3750	96	2400	138	3450
108	2700	162	4050	108	2700	150	3750
120	3000	174	4350	120	3000	162	4050


* For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length.
Pole diameter 2-7/8" (73 mm)

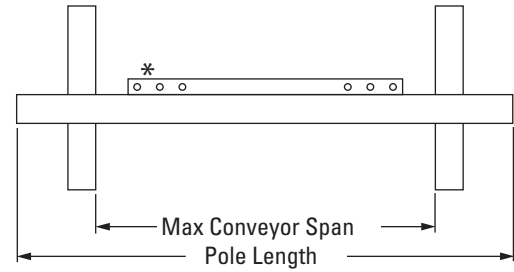

*Each pole size can be used with a blade size matched to the belt's material path (ranging from belt width -6" (-150 mm) to belt width -36" (-900mm) in 6" (150 mm) increments). Available down to 24" (600 mm) blade width.

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
8	200	19.5	488



PST Spring Length Chart

Blade Width		White Springs		Silver Springs		Red Springs	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	5 5/8	143	N/A	N/A	N/A	N/A
24	600	5 3/8	137	6 1/4	159	N/A	N/A
30	750	5	127	6 1/8	156	6 1/4	159
36	900	4 3/4	121	6	152	6 1/4	159
42	1050	N/A	N/A	6	152	6 1/8	156
48	1200	N/A	N/A	5 7/8	149	6 1/8	156
54	1350	N/A	N/A	5 3/4	146	6	152
60	1500	N/A	N/A	5 5/8	143	6	152
66	1650	N/A	N/A	5 5/8	143	5 7/8	149
72	1800	N/A	N/A	5 1/2	140	5 7/8	149
78	1950	N/A	N/A	5 3/8	137	5 3/4	146
84	2100	N/A	N/A	N/A	N/A	5 3/4	146
90	2250	N/A	N/A	N/A	N/A	5 5/8	143
96	2400	N/A	N/A	N/A	N/A	5 5/8	143
102	2550	N/A	N/A	N/A	N/A	5 1/2	140
108	2700	N/A	N/A	N/A	N/A	5 1/2	140
114	2850	N/A	N/A	N/A	N/A	5 3/8	137

Shading indicates preferred spring option.



PAT Pressure Chart

Blade Width		Pressure	
in.	mm	psi	kPa
18	450	8	55
24	600	10	69
32	800	13	90
36	900	15	103
42	1050	18	124
48	1200	20	138
54	1350	23	159
60	1500	25	172
66	1650	28	193
72	1800	31	214
78	1950	33	228
84	2100	36	248
90	2250	38	262
96	2400	41	283
102	2550	43	296
108	2700	46	317
114	2850	48	331

Specifications:

- Maximum Belt Speed 1500 FPM (7.5M/sec)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Minimum Pulley Diameter 20" (500 mm)
- Blade Height 12.25" (306 mm)
- Usable Blade Wear Length 8" (200 mm)
- Blade Material..... Urethane (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths..... 24 to 120" (600 to 3000 mm). Other sizes available upon request.
- CEMA Cleaner Rating..... Class 5


Section 8 – Specs and CAD Drawings

8.2 Specifications & Guidelines - MHP UG

Pole Length Specifications*

CLEANER SIZE		MAX OVERALL POLE LENGTH		CENTER POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
48	1200	144	3600	54	1350	132	3300
54	1350	150	3750	60	1500	138	3450
60	1500	156	3900	66	1650	144	3600
72	1800	168	4200	78	1950	156	3900
84	2100	180	4500	90	2250	168	4200
96	2400	192	4800	102	2550	180	4500
108	2700	204	5100	114	2850	192	4800
120	3000	216	4350	126	3150	204	5100


* For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length.
Pole diameter 2-7/8" (73 mm)

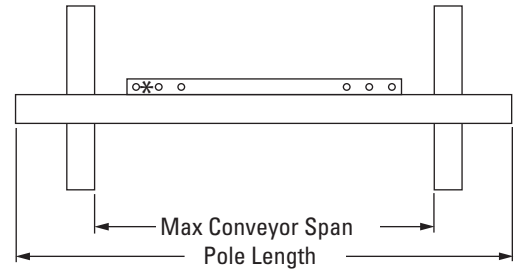

*Each pole size can be used with a blade size matched to the belt's material path (ranging from belt width -6" (-150 mm) to belt width -36" (-900 mm) in 6" (150 mm) increments). Available down to 48" (1200 mm) blade width.

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
8	200	19.5	488



PST Spring Length Chart

Blade Width		White Springs		Silver Springs		Red Springs	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	5 5/8	143	N/A	N/A	N/A	N/A
24	600	5 3/8	137	6 1/4	159	N/A	N/A
30	750	5	127	6 1/8	156	6 1/4	159
36	900	4 3/4	121	6	152	6 1/4	159
42	1050	N/A	N/A	6	152	6 1/8	156
48	1200	N/A	N/A	5 7/8	149	6 1/8	156
54	1350	N/A	N/A	5 3/4	146	6	152
60	1500	N/A	N/A	5 5/8	143	6	152
66	1650	N/A	N/A	5 5/8	143	5 7/8	149
72	1800	N/A	N/A	5 1/2	140	5 7/8	149
78	1950	N/A	N/A	5 3/8	137	5 3/4	146
84	2100	N/A	N/A	N/A	N/A	5 3/4	146
90	2250	N/A	N/A	N/A	N/A	5 5/8	143
96	2400	N/A	N/A	N/A	N/A	5 5/8	143
102	2550	N/A	N/A	N/A	N/A	5 1/2	140
108	2700	N/A	N/A	N/A	N/A	5 1/2	140
114	2850	N/A	N/A	N/A	N/A	5 3/8	137

Shading indicates preferred spring option.



PAT Pressure Chart

Blade Width		Pressure	
in.	mm	psi	kPa
18	450	8	55
24	600	10	69
32	800	13	90
36	900	15	103
42	1050	18	124
48	1200	20	138
54	1350	23	159
60	1500	25	172
66	1650	28	193
72	1800	31	214
78	1950	33	228
84	2100	36	248
90	2250	38	262
96	2400	41	283
102	2550	43	296
108	2700	46	317
114	2850	48	331


Specifications:

- Maximum Belt Speed 1500 FPM (7.5M/sec)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Minimum Pulley Diameter 20" (500 mm)
- Blade Height 12.25" (306 mm)
- Usable Blade Wear Length 8" (200 mm)
- Blade Material Urethane (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths 48 to 120" (1200 to 3000 mm). Other sizes available upon request.
- CEMA Cleaner Rating Class 5

Section 8 – Specs and CAD Drawings


8.3 CAD Drawing - MHP - PST2

SPECIFICATIONS		MHP CLEANER ASSY		ITEM NUMBER 1 CTR POLE		ITEM NUMBER 2 MRB BLADE	
BELT WIDTH "A" (in)	MAX POLE LENGTH "B" (mm)	ORDER NUMBER	ITEM CODE	ORDER NUMBER	ITEM CODE	ORDER NUMBER	ITEM CODE
24	600	MHP-624	77703	MMPCP24	76458	MRB18	77531
30	750	MHP-630	77704	MMPCP30	76459	MRB24	77532
36	900	MHP-636	77705	MMPCP36	76460	MRB30	77533
42	1050	MHP-642	77706	MMPCP42	76461	MRB36	77534
48	1200	MHP-648	77707	MMPCP48	76462	MRB42	77535
54	1350	MHP-654	77708	MMPCP54	76463	MRB48	77536
60	1500	MHP-660	77709	MMPCP60	76464	MRB54	77537
72	1800	MHP-672	77710	MMPCP72	76465	MRB66	77539
84	2100	MHP-684	77711	MMPCP84	76466	MRB78	77541
96	2400	MHP-696	77712	MMPCP96	77722	MRB90	77543
108	2700	MHP-708	90151	MMPCP108	90326	MRB102	77545

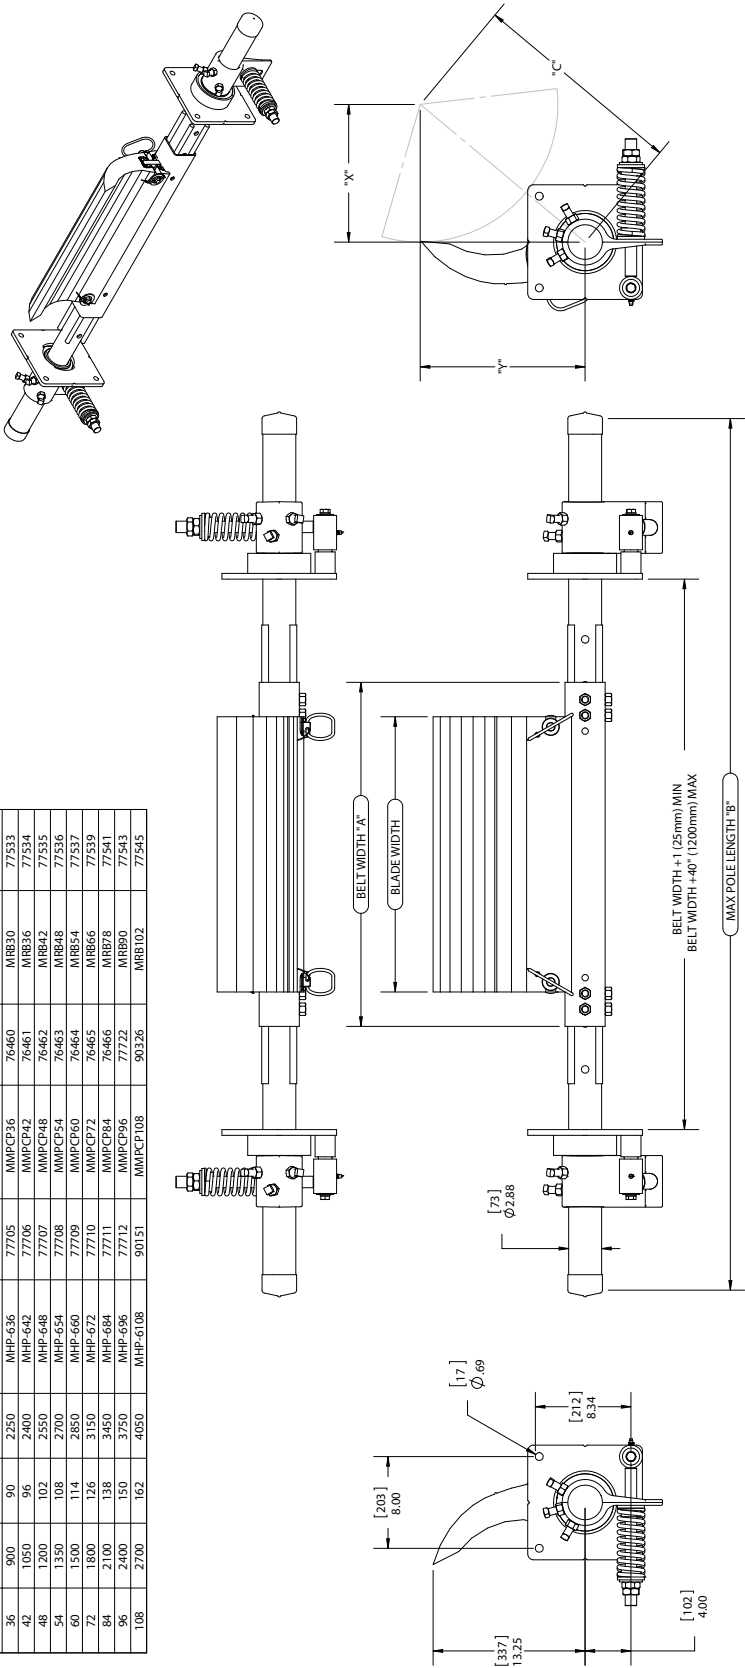


Section 8 – Specs and CAD Drawings

8.4 CAD Drawing - MHP - PAT

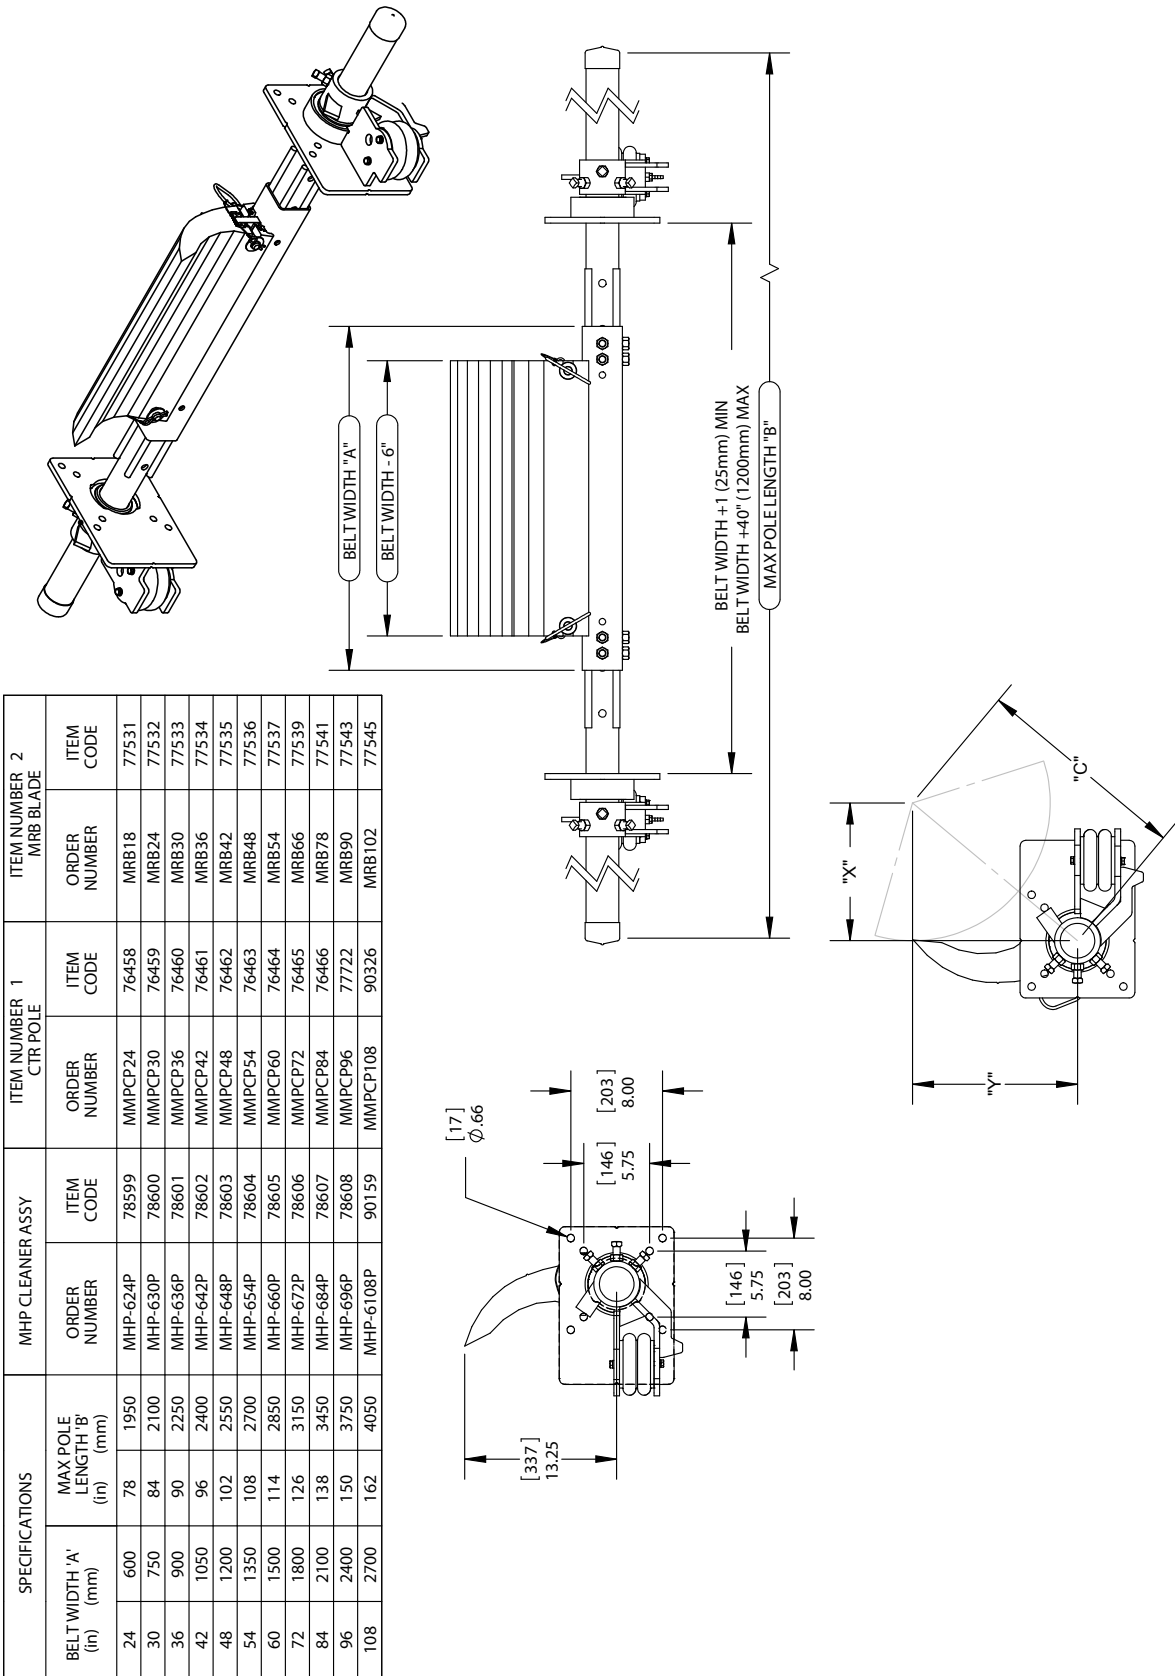


Section 8 – Specs and CAD Drawings

8.5 CAD Drawing - MHP UG - PST2

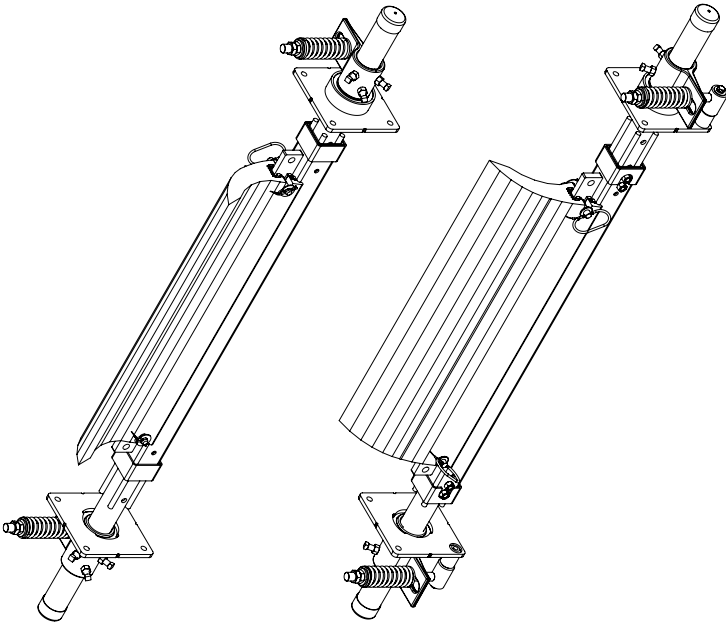


SPECIFICATIONS					MHP CLEANER ASSY		ITEM NUMBER 1 CTR POLE		MRB BLADE					
BELT WIDTH (in)	BLADE WIDTH "A" (in)	CENTER POLE LENGTH "B" (in)	MAX POLE LENGTH "C" (in)	MAX POLE LENGTH "C" (mm)	ORDER NUMBER	ITEM CODE	ORDER NUMBER	ITEM CODE	ORDER NUMBER	ITEM CODE				
48	1200	42	1050	54	1350	144	3600	MHP-648-UG	92061	MMPCP54	76463	MRB42	MRB42	77535
54	1350	48	1200	60	1500	150	3750	MHP-654-UG	92062	MMPCP60	76464	MRB48	MRB48	77536
60	1500	54	1350	66	1650	156	3900	MHP-660-UG	92063	MMPCP66	91937	MRB54	MRB54	77537
72	1800	66	1650	78	1950	168	4200	MHP-672-UG	92064	MMPCP78	91938	MRB66	MRB66	77539
84	2100	78	1950	90	2250	180	4500	MHP-684-UG	92065	MMPCP90	91939	MRB78	MRB78	77541
96	2400	90	2250	102	2550	192	4800	MHP-696-UG	92066	MMPCP102	91940	MRB90	MRB90	77543
108	2700	102	2550	114	2850	204	5100	MHP-6108-UG	92067	MMPCP114	91941	MRB102	MRB102	77545
120	3000	114	2850	126	3150	216	5400	MHP-6120-UG	93440	MMPCP120	90327	MRB114	MRB114	77547

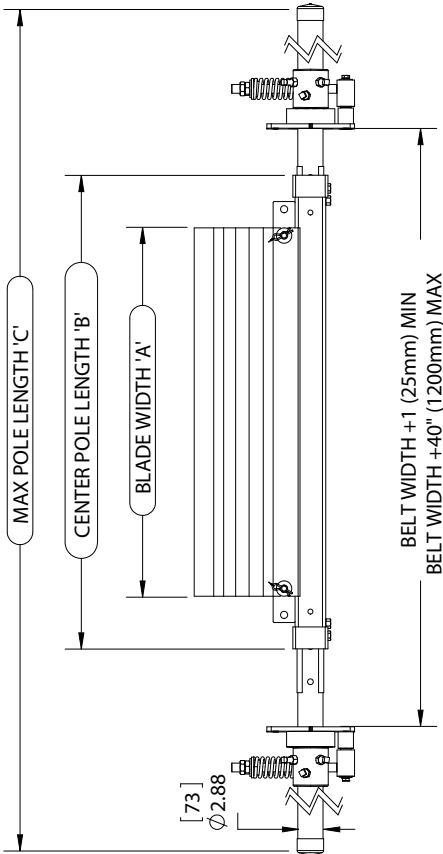


Section 8 – Specs and CAD Drawings

8.6 CAD Drawing - MHP UG - PAT

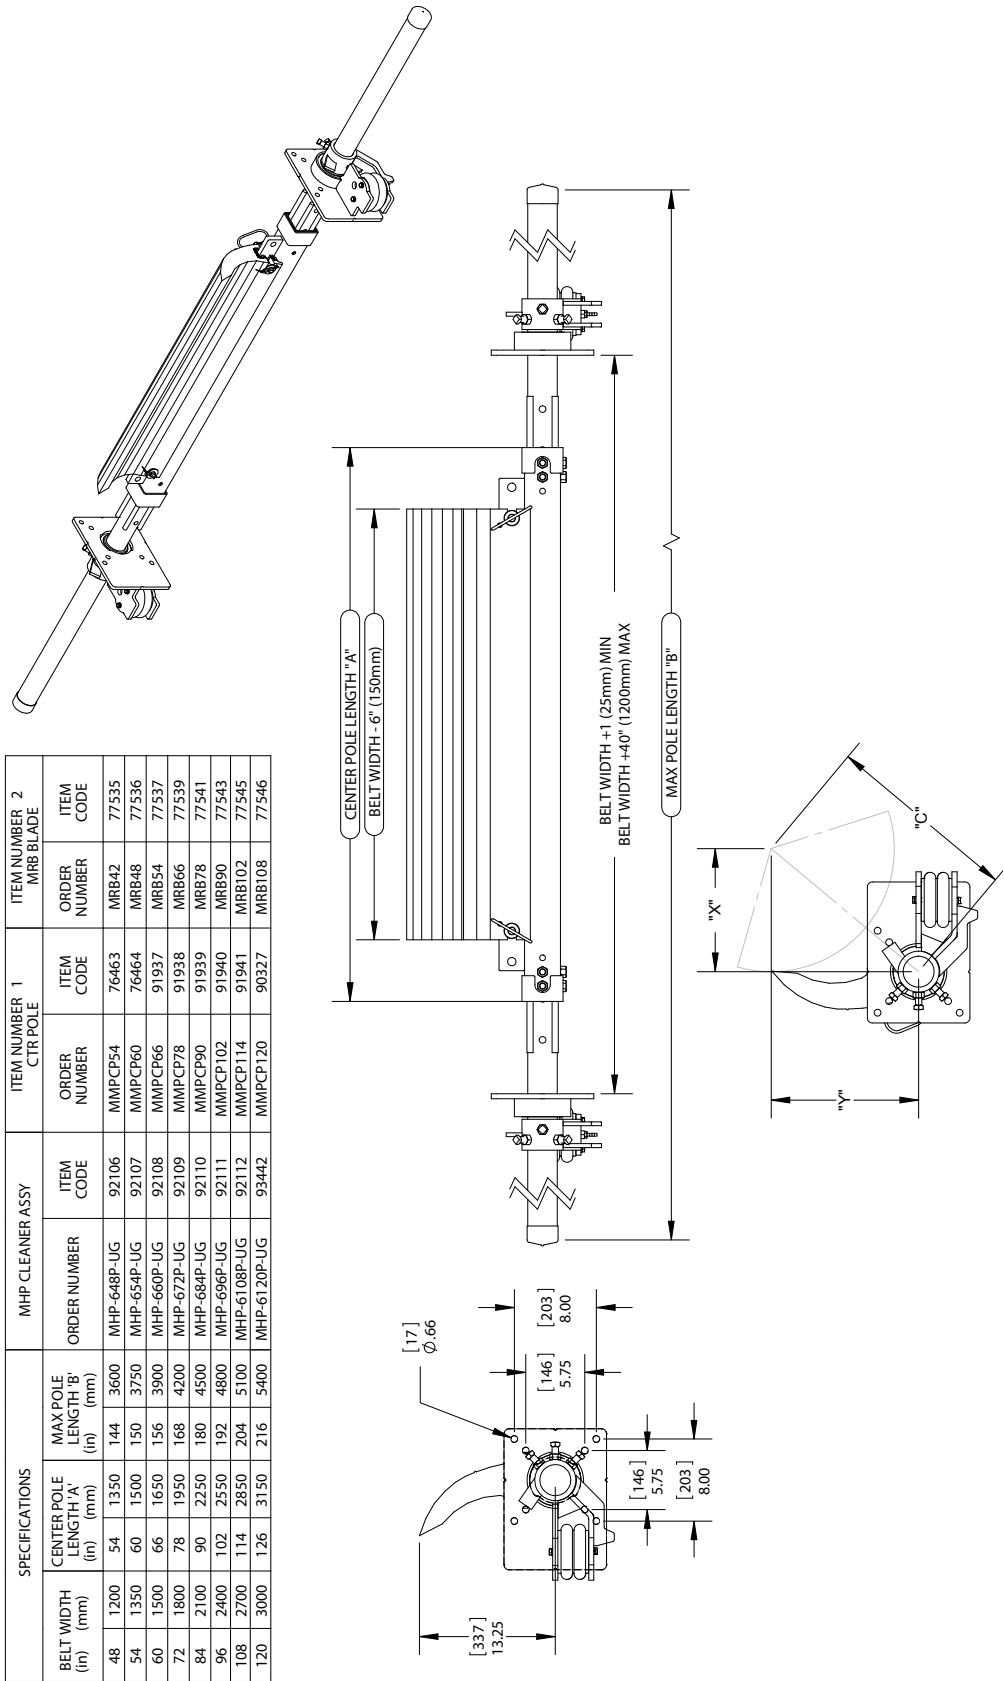

Section 9 – Replacement Parts

9.1 Replacement Parts List - MHP

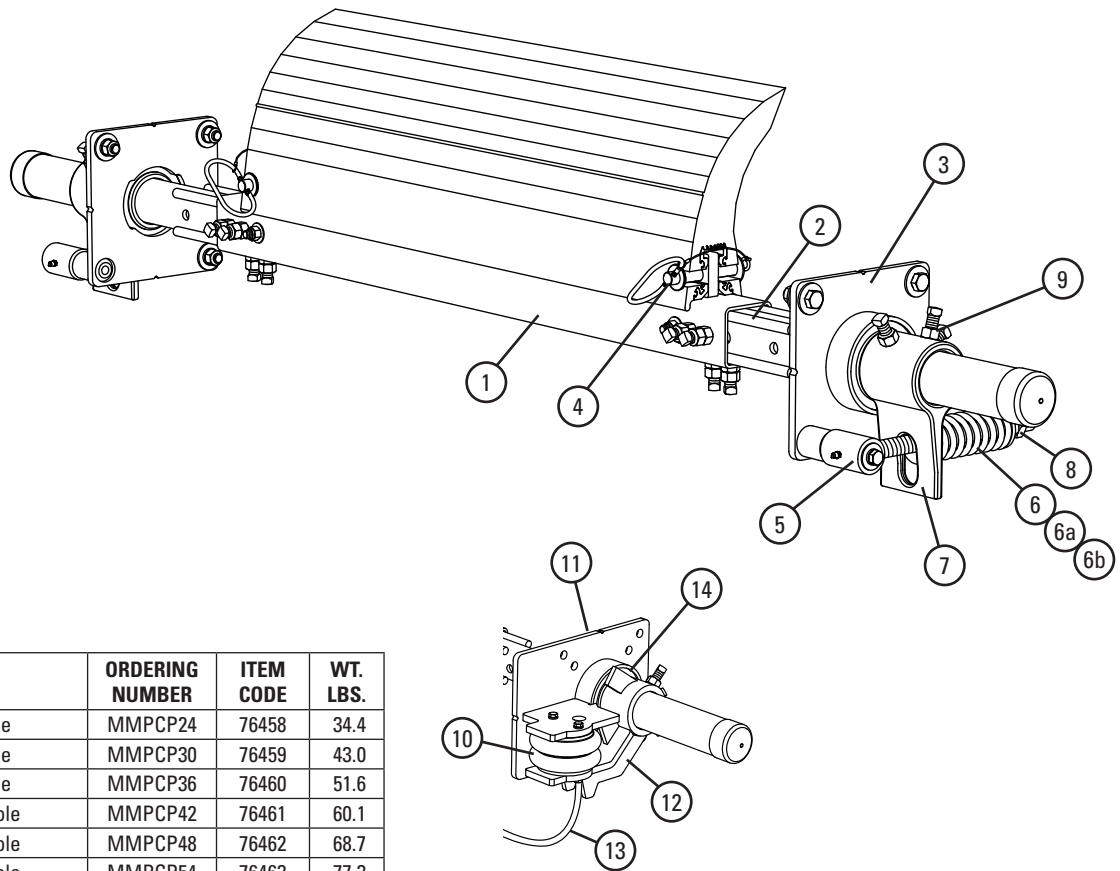

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	24" (600mm) Center Pole	MMPCP24	76458	34.4
	30" (750mm) Center Pole	MMPCP30	76459	43.0
	36" (900mm) Center Pole	MMPCP36	76460	51.6
	42" (1050mm) Center Pole	MMPCP42	76461	60.1
	48" (1200mm) Center Pole	MMPCP48	76462	68.7
	54" (1350mm) Center Pole	MMPCP54	76463	77.3
	60" (1500mm) Center Pole	MMPCP60	76464	85.9
	72" (1800mm) Center Pole	MMPCP72	76465	103.1
	84" (2100mm) Center Pole	MMPCP84	76808	120.3
	96" (2400mm) Center Pole	MMPCP96	77722	137.5
	108" (2700mm) Center Pole	MMPCP108	90326	154.7
	120" (3000mm) Center Pole	MMPCP120	90327	171.9
2	Extender Pole Kit (2 ea.)	MHP-EP	76392	54.0
3	Mounting Plate Kit* (2 ea.)	MHPMPK	77727	44.4
4	Blade Pin Kit* (1 ea.)	MHPBPk	77728	0.8
5	Torque Pivot Kit* (1 ea.)	PTPK	75897	7.0
6	Tension Spring-White (1 ea.) for blades 18-42" (450-1050mm)	PSTS-W	75898	1.7
6a	Tension Spring-Silver (1 ea.) for blades 48-78" (1200-1950mm)	PSTS-S	75899	3.0
6b	Tension Spring-Red (1 ea.) for blades 84-114" (2100-2850mm)	PSTS-R	77726	4.3
7	Torque Arm Kit* (1 ea.)	PSTA	75896	11.4
8	Bushing Kit (2 ea.)	QMTBK-W	76098	0.2
9	Jam Nut Kit PST Tensioner	JNK-D	79894	0.3
-	PST Spring Tensioner*-White (incl. 2 ea. Items 3, 5, 6, 7, & 8) for blades 18-42" (450-1050mm)	PST2-W	77723	86.1
-	PST Spring Tensioner*-Silver (incl. 2 ea. Items 3, 5, 6a, 7a, & 8) for blades 48-78" (1200-1950mm)	PST2-S	77724	87.4
-	PST Spring Tensioner*-Red (incl. 2 ea. Items 3, 5, 6b, 7b, & 8) for blades 84-114" (2100-2850mm)	PST2-R	77725	88.8

*Hardware Included
Lead Time: 1 working day

PAT Air & Nitrogen Tensioner Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
10	Air/Water Bag (1 ea.)	AWTB	75905	3.8
11	Mounting Base (1 ea.)	AWTMB	75906	22.9
12	Torque Arm * (1 ea.)	AWTA	75907	11.6
13	Hose Kit (50' (15 M) of hose and 6 hose clamps)	AWTHK	75909	6.7
14	AWT Pole Bearing Assy (for cleaners shipped after 4/2016)	AWTPBA	90000	2.3
-	AWT Air/Water Tensioner (includes 2 each items 9, 10, 11 & 1 ea. item 12)	AWTNCB	76069	75.2


*Hardware Included
Lead time: 1 working day

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	77723 PST2-W	77724 PST2-S	77725 PST2-R
MegaShear™ 18-42" (450-1050mm)	X		
MegaShear™ 48-78" (1200-1950mm)		X	
MegaShear™ 84-114" (2100-2850mm)			X

Section 9 – Replacement Parts

9.2 Replacement Parts List - MHP UG

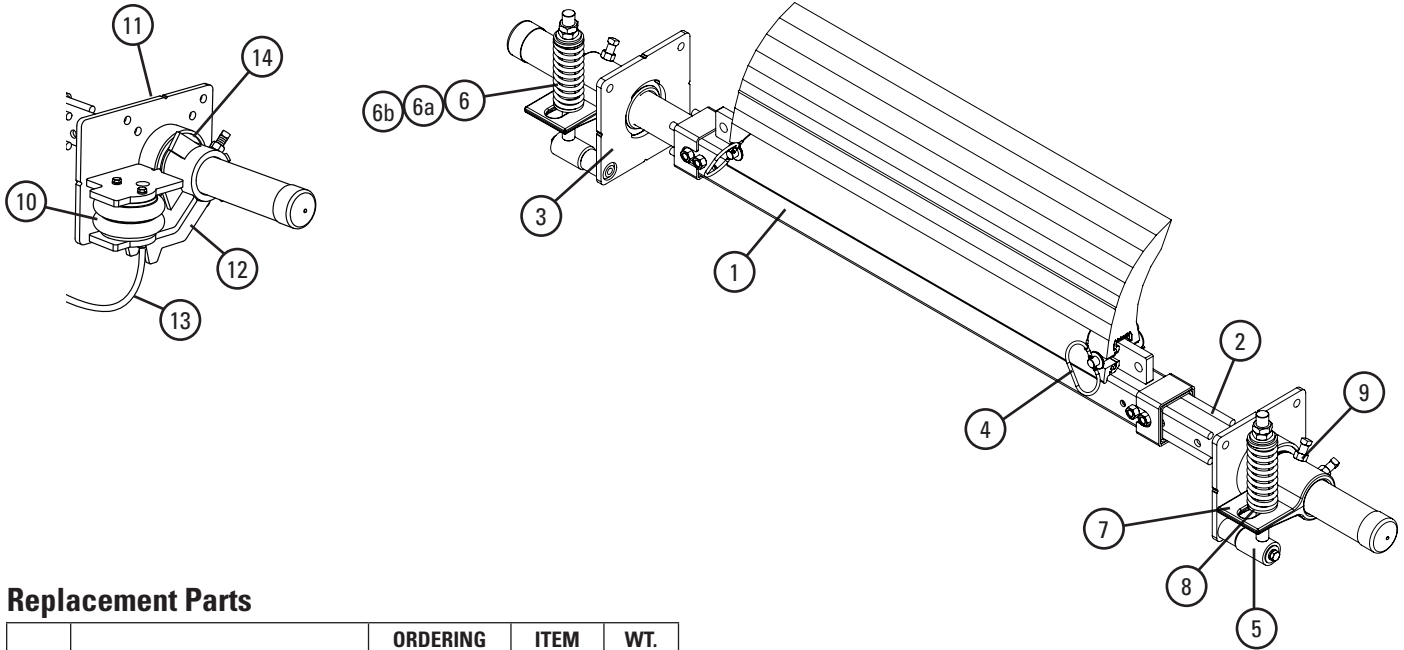

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	48" (1200mm) UG Center Pole	MMPCP48UG	91918	68
	54" (1350mm) UG Center Pole	MMPCP54UG	91919	75
	60" (1500mm) UG Center Pole	MMPCP60UG	91920	82
	72" (1800mm) UG Center Pole	MMPCP72UG	91921	119
	84" (2100mm) UG Center Pole	MMPCP84UG	91922	137
	96" (2400mm) UG Center Pole	MMPCP96UG	91923	156
	108" (2700mm) UG Center Pole	MMPCP108UG	91924	174
	120" (3000mm) UG Center Pole	MMPCP120UG	91925	192
2	Extender Pole HD Kit (2 ea.)	MHP-EPHD-54	91347	126
3	Mounting Plate Kit* (2 ea.)	MHPMPK	77727	44.4
4	Blade Pin Kit* (1 ea.)	MHPBPK	77728	0.8
5	Torque Pivot Kit* (1 ea.)	PTPK	75897	7
6	Tension Spring—White (1 ea.) for blades 18–42" (450–1050mm)	PSTS-W	75898	1.7
6a	Tension Spring—Silver (1 ea.) for blades 48–78" (1200–1950mm)	PSTS-S	75899	3
6b	Tension Spring—Red (1 ea.) for blades 84–114" (2100–2850mm)	PSTS-R	77726	4.3
7	Torque Arm Kit* (1 ea.)	PSTA	75896	11.4
8	Bushing Kit (2 ea.)	QMTBK-W	76098	0.2
9	Jam Nut Kit PST Tensioner	JNK-D	79894	0.3
-	PST Spring Tensioner*—White (incl. 2 ea. Items 3, 5, 6, 7, & 8) for blades 18–42" (450–1050mm)	PST2-W	77723	86.1
-	PST Spring Tensioner*—Silver (incl. 2 ea. Items 3, 5, 6a, 7a, & 8) for blades 48–78" (1200–1950mm)	PST2-S	77724	87.4
-	PST Spring Tensioner*—Red (incl. 2 ea. Items 3, 5, 6b, 7b, & 8) for blades 84–114" (2100–2850mm)	PST2-R	77725	88.8

*Hardware Included
Lead Time: 1 working day

PAT Air & Nitrogen Tensioner Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
10	Air/Water Bag (1 ea.)	AWTB	75905	3.8
11	Mounting Base (1 ea.)	AWTMB	75906	22.9
12	Torque Arm * (1 ea.)	AWTA	75907	11.6
13	Hose Kit (50' (15 M) of hose and 6 hose clamps)	AWTHK	75909	6.7
14	AWT Pole Bearing Assy (for cleaners shipped after 4/2016)	AWTPBA	90000	2.3
-	AWT Air/Water Tensioner (includes 2 each items 9, 10, 11 & 1 ea. item 12)	AWTNCB	76069	75.2

*Hardware Included
Lead time: 1 working day

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	77723 PST2-W	77724 PST2-S	77725 PST2-R
MegaShear™ 18–42" (450–1050 mm)	X		
MegaShear™ 48–78" (1200–1950 mm)		X	
MegaShear™ 84–114" (2100–2850 mm)			X

Section 10 – Other Flexco Conveyor Products

Flexco provides many conveyor products that help your conveyors to run more efficiently and safely. These components solve typical conveyor problems and improve productivity. Here is a quick overview on just a few of them:

EZP1 Precleaner



- Patented ConShear™ blade renews its cleaning edge as it wears
- Visual Tension Check™ for optimal blade tensioning and simple retensioning
- Quick and easy one-pin blade replacement Material Path Option™ for optimal cleaning and reduced maintenance

DRX Impact Beds



- Exclusive Velocity Reduction Technology™ to better protect the belt
- Slide-Out Service™ gives direct access to all impact bars for change-out
- Impact bar supports for longer bar life
- 4 models to custom fit to the application

EZS2 Secondary Cleaner



- Long-wearing tungsten carbide blades for superior cleaning efficiency
- Patented FormFlex™ cushions independently tension each blade to the belt for consistent, constant cleaning power
- Easy to install, simple to service
- Works with Flexco mechanical belt splices

PT Max™ Belt Trainer



- Patented “pivot & tilt” design for superior training action
- Dual sensor rollers on each side to minimize belt damage
- Pivot point guaranteed not to freeze or seize up
- Available for topside and return side belts

Flexco Specialty Belt Cleaners



- “Limited space” cleaners for tight conveyor applications
- High Temp cleaners for severe, high heat applications
- A rubber fingered cleaner for chevron and raised rib belts
- Multiple cleaner styles in stainless steel for corrosive applications

Belt Plows



- A belt cleaner for the tail pulley
- Exclusive blade design quickly spirals debris off the belt
- Economical and easy to service
- Available in vee or diagonal models

Visit www.flexco.com for other Flexco locations and products, or to find an authorized distributor.

©2022 Flexible Steel Lacing Company. 01-11-24. X2552

