


PT Smart™ Belt Trainer

Installation, Operation and Maintenance Manual

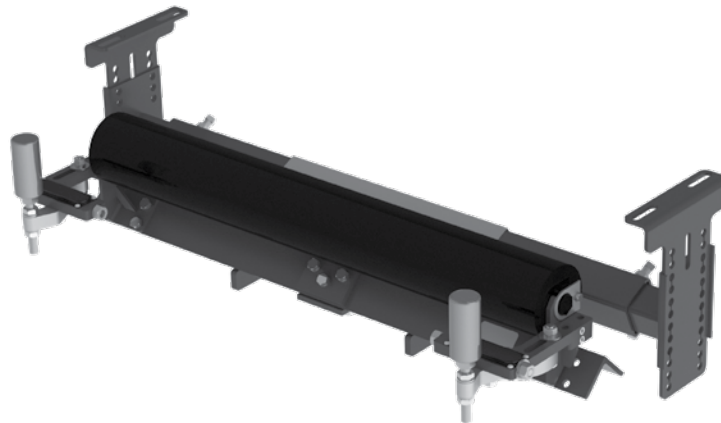

PT Smart™ Belt Trainer

Serial Number: _____
Purchase Date: _____
Purchased From: _____
Installation Date: _____

Serial number information can be found on the Serial Number Label included in the Information Packet found in the cleaner carton.

This information will be helpful for any future inquiries or questions about belt cleaner replacement parts, specifications or troubleshooting.

Table of Contents

Section 1 - Important Information	4
1.1 General Introduction.....	4
1.2 User Benefits	4
1.3 Proper Belt Trainer Selection.....	5
Section 2 - Safety Considerations and Precautions	6
2.1 Stationary Conveyors.....	6
2.2 Operating Conveyors.....	6
Section 3 - Pre-Installation Checks and Options.....	7
3.1 Checklist	7
3.2 Optional Installation Accessories.....	8
Section 4 - Installation Instructions.....	9
Section 5 - Pre-Operation Checklist and Testing.....	12
5.1 Pre-Op Checklist.....	12
5.2 Test Run the Conveyor	12
Section 6 - Maintenance.....	13
6.1 New Installation Inspection	13
6.2 Routine Visual Inspection.....	13
6.3 Routine Physical Inspection	13
6.4 Roller Replacement Instructions.....	14
6.5 Sensor Roller Replacement Instructions.....	16
6.6 Maintenance Log	17
6.7 Maintenance Checklist	18
Section 7 - Troubleshooting	19
Section 8 - Specs and CAD Drawings.....	20
8.1 Specs and Guidelines	20
8.2 CAD Drawing - PT Smart Standard.....	21
8.3 CAD Drawing - PT Smart Underground Structure	22
Section 9 - Replacement Parts	23
9.1 Replacement Parts List	23
Section 10 - Other Flexco Conveyor Products	27

Section 1 - Important Information

1.1 General Introduction

We at Flexco are very pleased that you have selected a PT Smart™ Belt Trainer for your conveyor system.

This manual will help you to understand the installation, operation and maintenance of this product and assist you in making it work up to its maximum efficiency over its lifetime of service.

It is essential for safe and efficient operation that the information and guidelines presented be properly understood and implemented. This manual will provide safety precautions, installation instructions, maintenance procedures and troubleshooting tips. In addition, please follow all standard, approved safety guidelines when working on your conveyor.

If, however, you have any questions or problems that are not covered, please visit our web site or contact our Customer Service Department:

Customer Service: 400-820-6896

Visit www.flexco.com for other Flexco locations and products.

Please read this manual thoroughly and pass it on to any others who will be directly responsible for installation, operation and maintenance of this impact bed. While we have tried to make the installation and service tasks as easy and simple as possible, **this product does however require correct installation and regular inspection and maintenance to maintain top working condition.**


1.2 User Benefits

Belt mistracking is a common problem that produces various problems, ranging from belt and structure damage to product spillage and safety issues. By utilizing the PT Smart™, it is possible to correct a belt that is mistracking and causing these problems. Multiple units may be required depending on the length of the mistracking belt.

Section 1 - Important Information

1.3 Proper Belt Trainer Selection

MODEL	APPLICATION RANGE
Belt Positioner™	Return side only, 140 n/mm (800 PIW) max tension on Small, Medium and Large; 210 n/mm (1200 PIW) max tension on Extra Large. Also works on reversing belts.
PTEZ™	Medium-duty belts up to 280 n/mm (1600 PIW) max tension. Also works on reversing belts.
PT Smart™	Medium-duty belts up to 280 n/mm (1600 PIW) max tension. Belt width + 75mm (3") idler. Belt thickness 25mm (1") maximum.
PT Smart™ Underground	Medium-duty belts up to 280 n/mm (1600 PIW) max tension. Belt width + 9" (225mm) idler. Belt thickness 25mm (1") maximum. Fits underground structure.
PT Max™ Adjustable	Heavy-duty belts up to 525 n/mm (3000 PIW) max. Generally 19mm to 25mm thick (3/4" to 1") Belt width 900 - 1500mm (36" - 60")
HD PT Max™ Adjustable	Heavy-duty belts up to 1050 n/mm (6000 PIW) max tension. Belt width 1350 - 2100mm (54" - 84")

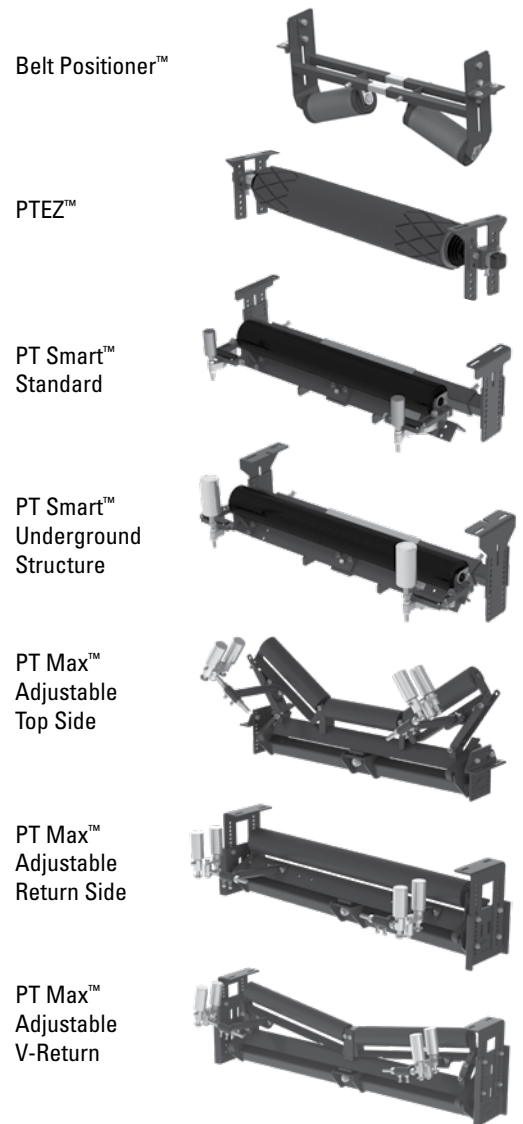

Conveyor Criteria	Belt Positioner™	PTEZ™	PT Smart™	PT Max™	Heavy Duty PT Max™	Super Duty PT Max™
Top side mistracking	No	No	No	Yes	Yes	Yes
Return side mistracking	Yes	Yes	Yes	Yes	Yes	Yes
Reversing	Yes	Yes	No	No	No	No
Belt mistracking to one side	Better	Better	Better	Better	Better	Better
Belt mistracking to both sides	Acceptable	Better	Best	Best	Best	Best
Inconsistent tracking problem	Good	Better	Best	Best	Best	Best
Belt is cupped (heavy)	Best ‡	Better‡	Better	Better	Better	Better
Belt has edge damage	Best	Best	Good	Good	Good	Good
Ease of Installation	Best	Better	Good	Good	Good	Good
Belt has low running tension (26 - 53 n/mm)	Good	Good	Good	Good	N/A	N/A
Belt has medium running tension (53 - 280 n/mm)	Better	Better	Better	Best	Best	Best
Belt has high running tension (280+ n/mm)	N/A	N/A	N/A	Better	Best	Best
Approx. "upstream" effect*Δ	15 M (50')	6 M (20')	6 M (20')	15 M (50')	15 M (50')	15 M (50')
Approx. "downstream" effect*Δ	15 M (50')	30 - 36 M (100' - 120')	36 - 45 M (120' - 150')	45 - 61 M (150' - 200')	45 - 61 M (150' - 200')	45 - 61 M (150' - 200')

‡ Installed on the clean side of the return belt

* Typical results; actual results may vary

Δ Disc idlers have the potential to reduce these numbers

Section 2 - Safety Considerations and Precautions

Before installing and operating the PT Smart™ Belt Trainer, it is important to review and understand the following safety information.

There are setup, maintenance and operational activities involving both **stationary** and **operating** conveyors. Each case has a safety protocol.

2.1 Stationary Conveyors

The following activities are performed on stationary conveyors:

- Installation
- Skirt rubber adjustments
- Impact bar replacement
- Cleaning
- Repairs

DANGER

It is imperative that OSHA/MSHA Lockout/Tagout (LOTO) regulations, 29 CFR 1910.147, be followed before undertaking the preceding activities. Failure to use LOTO exposes workers to uncontrolled behavior of the impact bed caused by movement of the conveyor belt. Severe injury or death can result.

Before working:

- Lockout/Tagout the conveyor power source
- Disengage any takeups
- Clear the conveyor belt or clamp securely in place

WARNING

Use Personal Protective Equipment (PPE):

- Safety eyewear
- Hardhats
- Safety footwear

Close quarters and heavy components create a worksite that compromises a worker's eyes, feet and skull. PPE must be worn to control the foreseeable hazards associated with conveyor belt components. Serious injuries can be avoided.

2.2 Operating Conveyors

There are two routine tasks that must be performed while the conveyor is running:

- Inspection of the sealing performance
- Dynamic troubleshooting

DANGER

Every belt conveyor is an in-running nip hazard. Never touch or prod an operating impact bed. Conveyor hazards cause instantaneous amputation and entrapment.

WARNING

Conveyor chutes contain projectile hazards. Stay as far from the trainer as practical and use safety eyewear and headgear. Missiles can inflict serious injury.


WARNING

Never adjust anything on an operating impact bed. Unforseeable materials falling into the chute can cause violent movements of the impact bed structure. Flailing hardware can cause serious injury or death.

Section 3 - Pre-installation Checks and Options

3.1 Checklist

- Check the model and size of the belt trainer. Is it the right one for your beltline?
- Check the PT Smart™ to be sure all the parts are included in the shipment.
- Find the Information Packet in the shipment.
- Review the “Tools Needed” section on the front of the installation instructions.
- Prepare the conveyor site:
 - Identify the point(s) of mistracking, expecting 36-45M (120' - 150') of downstream influence.
 - Position the unit 6M (20') after the start of the mistracking.
 - Identify an opening of at least 500mm (20") if possible to avoid interference with sensor rollers during installation.
 - Remove old tracking devices.
 - If the conveyor has disc idlers, replace one idler before and one idler after the location where the trainer will be installed with a standard idler.

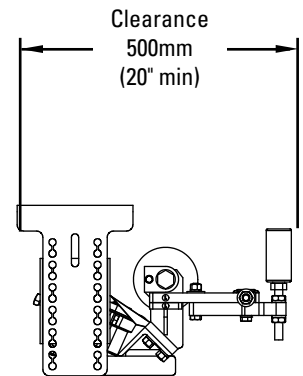

Section 3 - Pre-Installation Checks and Options (cont.)

3.2 Optional Installation Accessories


Optional tools can make the installation of the PT Smart™ Belt Trainer easier and faster.

Flex-Lifter™ Conveyor Belt Lifter


Description	Ordering Number	Item Code
Medium Flex-Lifter 900 - 1500 mm (36" - 60")	FL-M	76469
Large Flex-Lifter 1200 - 1800 mm (48" - 72")	FL-L	76470
XL Flex-Lifter 1800-2400 mm (72" - 96")	FL-XL	76983

Flex-Lifter™ Conveyor Belt Lifter

The Flexco Flex-Lifter makes the job of lifting the conveyor belt easy and safe. Using two Flex-Lifters, the belt can be quickly lifted out of the way to install the PT Smart™. The Flex-Lifter has the highest safe lift rating available at 1810 kg (4000 lbs.). And it's versatile. It can also be used to lift topside or return side belt for splicing, roller replacement or other maintenance jobs. Available in three sizes: Medium for belt widths 900 - 1500mm (36" - 60"), Large for belt widths 1200 - 1800mm (48" - 72"), and XL for belt widths 1800 - 2400mm (72" - 96").

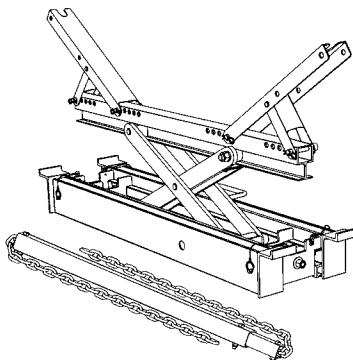

Section 4 - Installation Instructions - PT Smart™

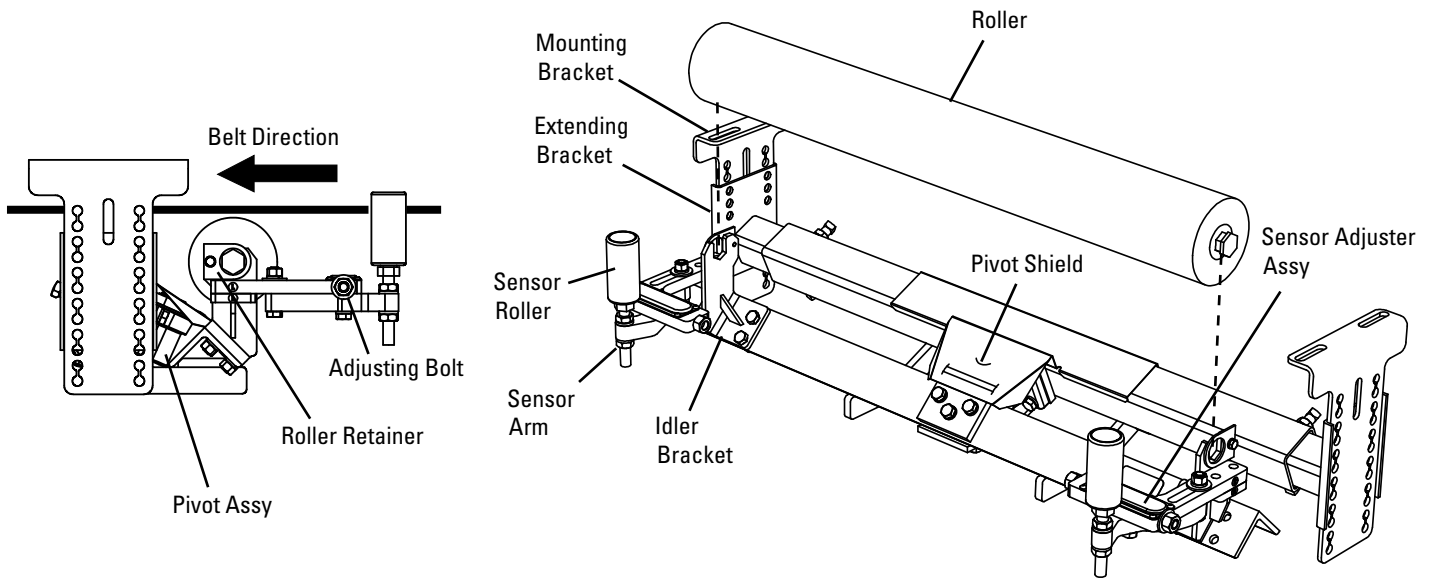

Physically lock out and tag the conveyor at the power source before you begin cleaner installation.

CAUTION: Components may be heavy. Use safety-approved lifting procedures.

- Tools Needed:**
- Tape measure
 - 19mm(3/4") wrench
 - Medium or large adjustable wrench
 - Cutting torch
 - Come-alongs (2) (3/4 ton min.)
 - Any necessary equipment for moving and lifting heavy components

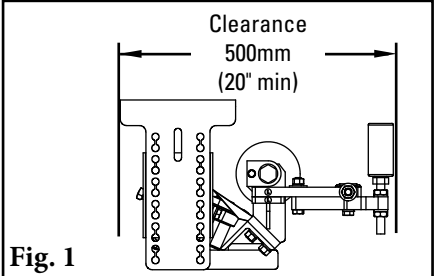


Fig. 1

1. **Prepare the conveyor site:**
 - Identify the point(s) of mistracking, expecting 36-45M (120' - 150') of downstream influence.
 - Position the unit 6M (20') after the start of the mistracking.
 - Identify an opening of at least 500mm (20") if possible to avoid interference with sensor rollers during installation (Fig. 1).
 - Remove old tracking devices.
2. **Position mounting brackets.** May be mounted to existing idler bracket mounts OR to outside of structure, if structure width is belt width +450mm (18") or less. Be sure belt passes between top and bottom mounting holes (Fig 2).
3. **Install mounting brackets.** Measure from a fixed location on both sides to ensure alignment.
4. **Lift the belt** approximately 75mm (3") where the trainer will be installed (Fig. 4).
5. **Remove existing idler** (if there is one in the location). **NOTE:** If the conveyor has disc idlers, replace one idler before and one idler after the location where the trainer will be installed with a standard idler.

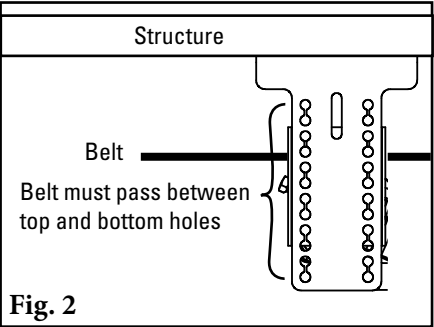


Fig. 2



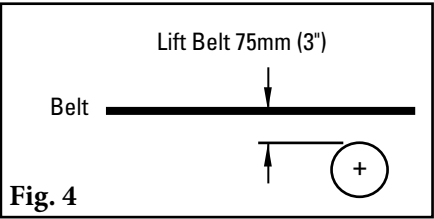




Fig. 4

Section 4 - Installation Instructions - PT Smart™



6. **Remove Roller** by unbolting Roller Retainer (Fig. 6a). Determine orientation of trainer and remove far side Extending Bracket (Fig. 6b).

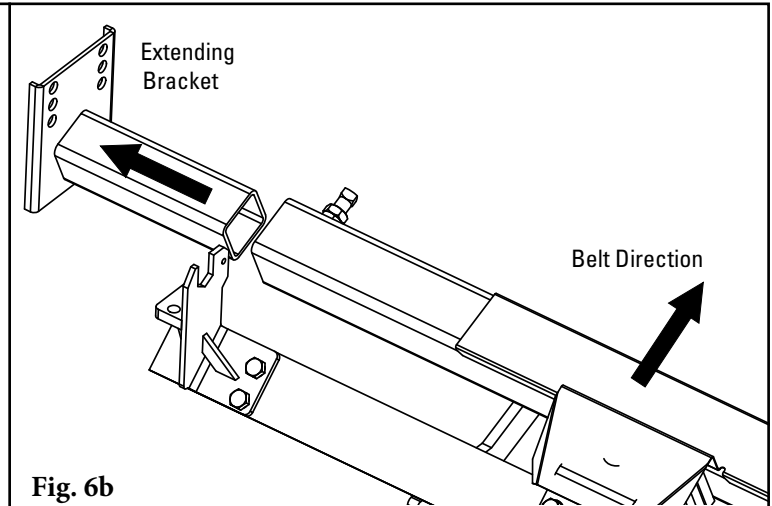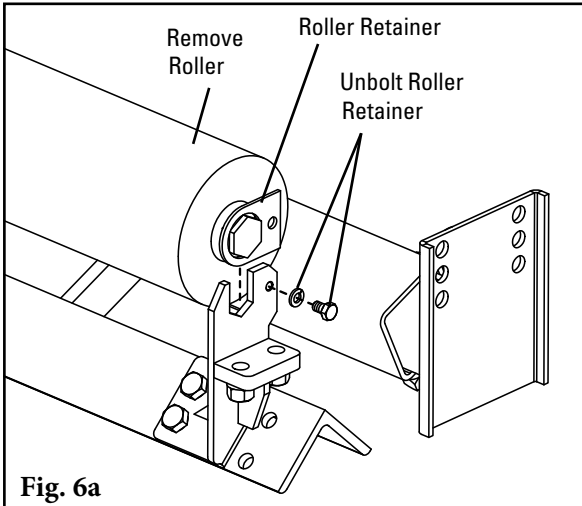

7. **Attach Extending Bracket** to mounting bracket already installed on far side of conveyor (Fig. 7). Finger-tighten bolts for future adjustment. Top bolt holes should be even with the normal height of the belt.
8. **Slide the far end of main frame** onto the extending bracket assembled in Step 7 (Fig. 8).

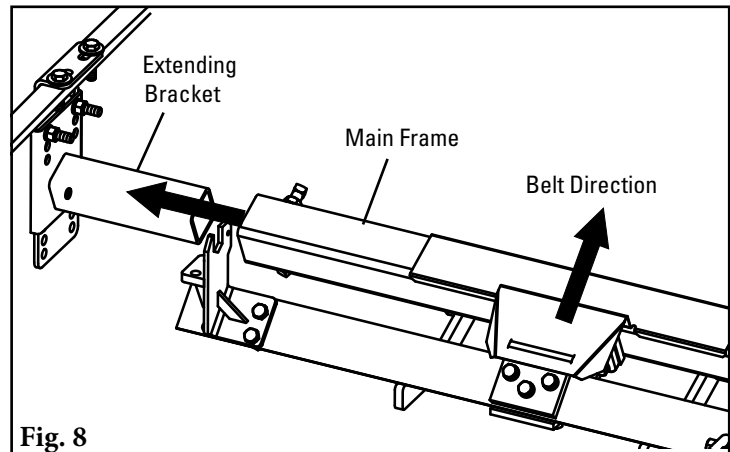
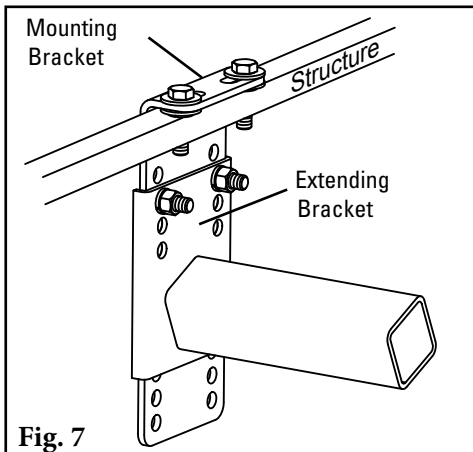


9. **Lift near end of main frame** and attach extending bracket to mounting bracket (Fig. 9a). Ensure main frame is centered on the Extending Brackets (equal length of extenders showing on both sides) (Fig. 9b).

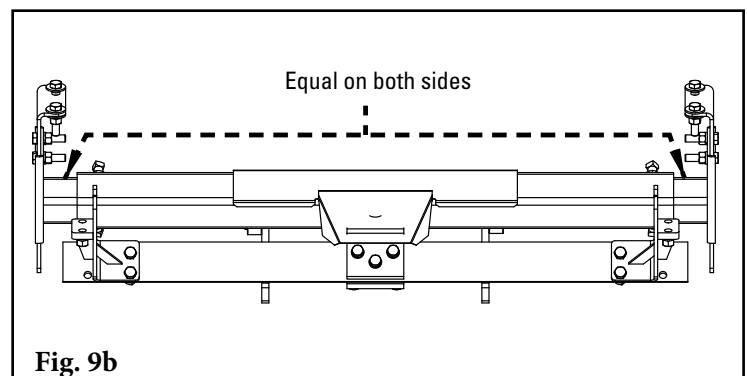
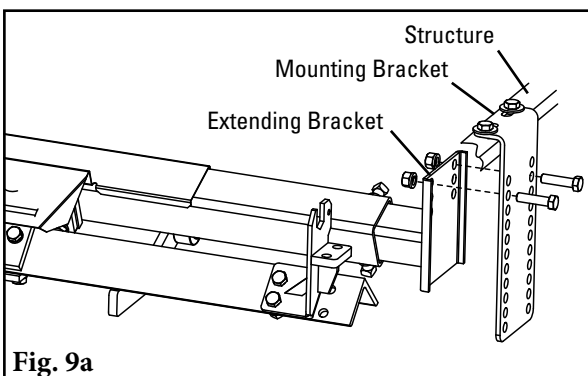


Section 4 - Installation Instructions - PT Smart™


10. **Reinstall roller** and re-bolt roller retainer (Fig. 10).
11. **Lower the belt.** Ensure belt completely contacts roller. Raise extending brackets one hole if there is not good contact (Fig. 9). Tighten all bolts.

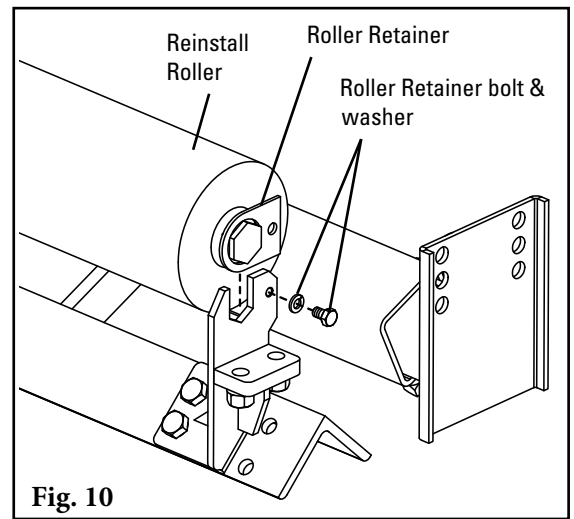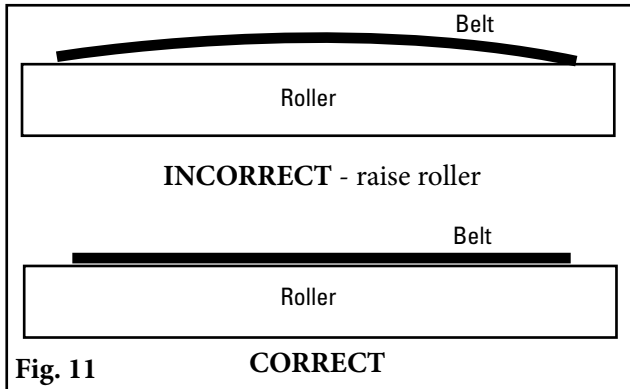

12. **Install sensor adjuster assemblies using included bolts.** Ensure left and right assemblies are installed on the correct sides. Adjust sensor rolls vertically using the adjustment nuts so the belt is centered on the roller.

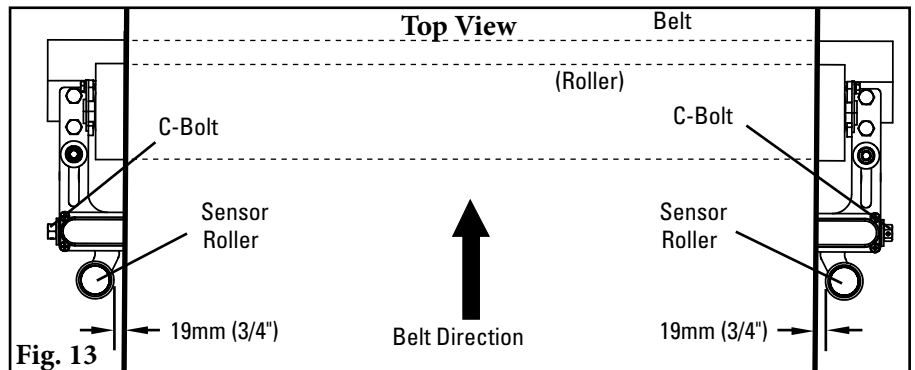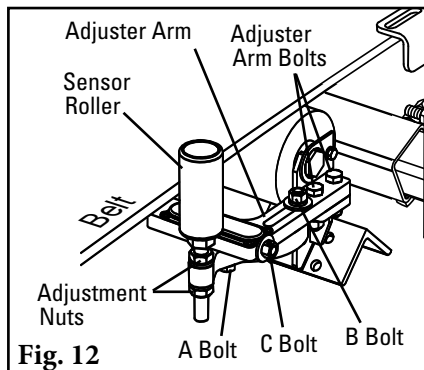

13. **Adjust sensor rollers** so they are 19mm (3/4") from the belt on each side. Adjust by loosening "A" and "B" bolts (shown in Fig. 12), then turning the "C" bolts (Fig. 13).
14. **Pivot the frame 13mm (1/2") to the side it is mistracking.** Bring sensor roller in until it touches the belt. Move opposite sensor roller out to 38mm (1-1/2") from the belt (Fig 14).

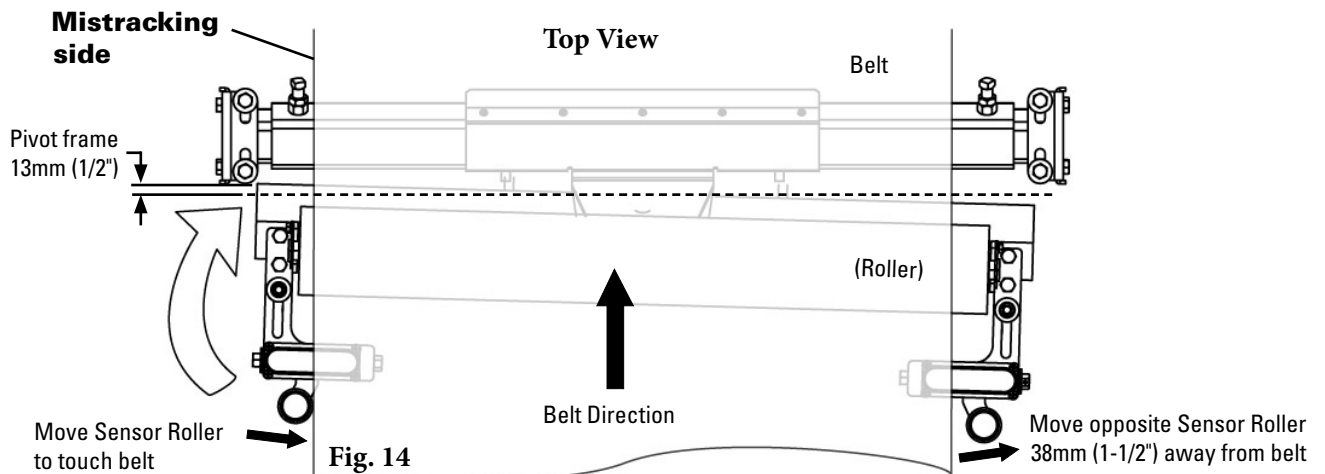



Section 5 - Pre-Operation Checklist and Testing

5.1 Pre-Op Checklist

- Recheck that all fasteners are tight
- Apply all supplied labels
- Be sure that all installation materials and tools have been removed from the belt and conveyor area

5.2 Test Run the Conveyor

- Run the conveyor for at least 15 minutes and confirm the belt is tracking properly.
- If belt is still mistracking too far to one side, bring that sensor roller in toward the center. Make adjustments of 6mm (1/4") at a time (Fig. 1). Do not pinch the belt between the rollers - rollers overall should be 38mm (1-1/2") wider than the belt (Fig. 2).
- NOTE: If the conveyor has disc idlers, the belt may not get the full downstream tracking effect.

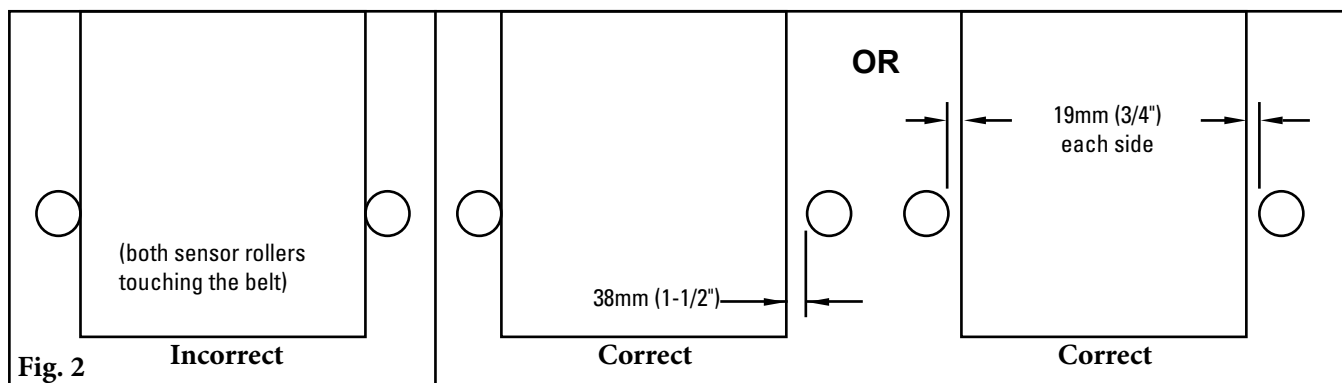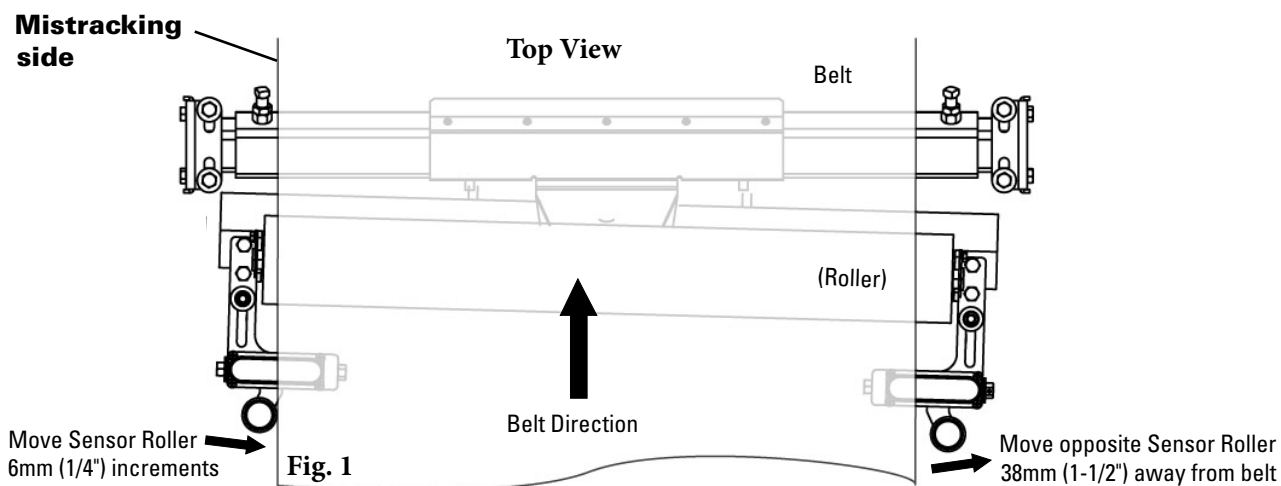

Section 6 - Maintenance

Flexco belt trainers are designed to operate with minimum maintenance. However, to maintain superior performance some service is required. When the trainer is installed a regular maintenance program should be set up. This program will ensure that the trainer operates at optimal efficiency, and problems can be identified and fixed before any damage is done to the belt, the trainer, other conveyor components, or structure.

All safety procedures for inspection of equipment (stationary or operating) must be observed. The PT Smart is in direct contact with the moving belt. Only visual observations can be made while the belt is running. Service tasks can be done only with the conveyor stopped and by observing the correct lockout/tagout procedures.

6.1 New Installation Inspection

After the PT Smart™ has run for 15 minutes a visual inspection should be made to ensure the trainer is performing properly. Make adjustments as needed.

6.2 Routine Visual Inspection (every 2-4 weeks)

A visual inspection of the PT Smart can determine:

- If the belt is tracking as required
- If the trainer is moving freely
- If the main frame is free of material and rolling properly
- If there is damage to the main frame or other components
- If the sensor rollers are turning freely and without damage

If any of the above conditions exist, a determination should be made on when the conveyor can be stopped for trainer maintenance.

6.3 Routine Physical Inspection (every 6-8 weeks)

When the conveyor is not in operation and properly locked and tagged out, a physical inspection of the trainer to perform the following tasks:

- Clean material buildup off the trainer and components.
- Closely inspect both sensor rollers for free movement and wear. Replace if needed.
- Closely inspect main roller for free movement and wear. Replace if needed.
- Pivot unit to ensure full and easy movement.
- Closely inspect complete unit for damage.
- Inspect all fasteners for tightness and wear. Tighten or replace if needed.
- When maintenance tasks are completed, test run the conveyor to ensure the trainer is performing properly.

Section 6 - Maintenance

6.4 Roller Replacement Instructions

Physically lock out and tag the conveyor at the power source before you begin cleaner installation.

CAUTION: Components may be heavy. Use safety-approved lifting procedures.

1. **Remove tension from belt.** Use a Flex-Lifter or other appropriate lifting equipment to lift the belt approx. 75mm (3") off the trainer.
2. **Remove roller** by unbolting Roller Retainers (Fig. 2).

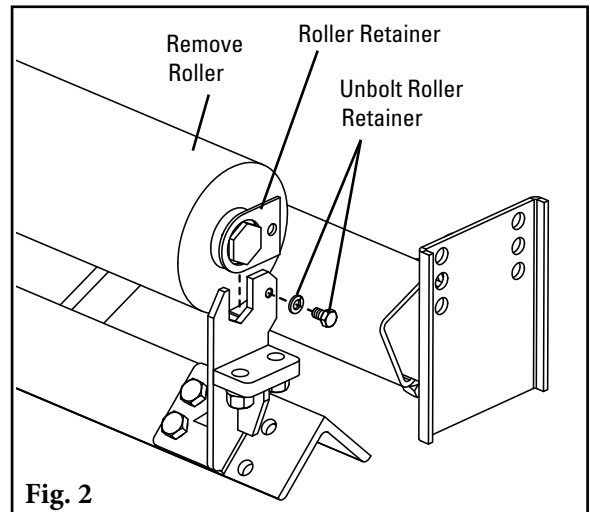
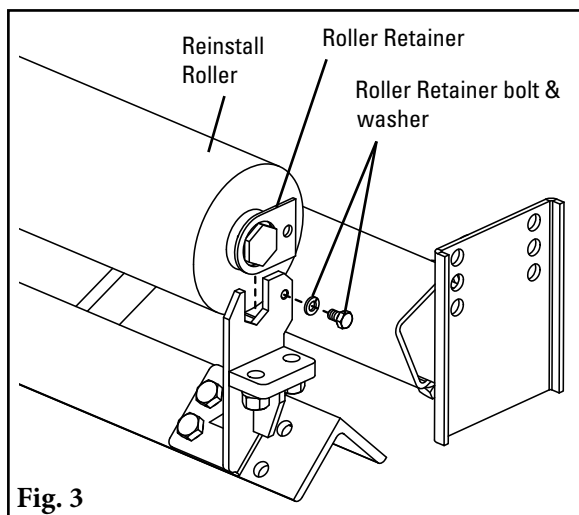


Fig. 2

3. **Install new roller** and re-bolt roller retainer (Fig. 3). Confirm roller turns smoothly.

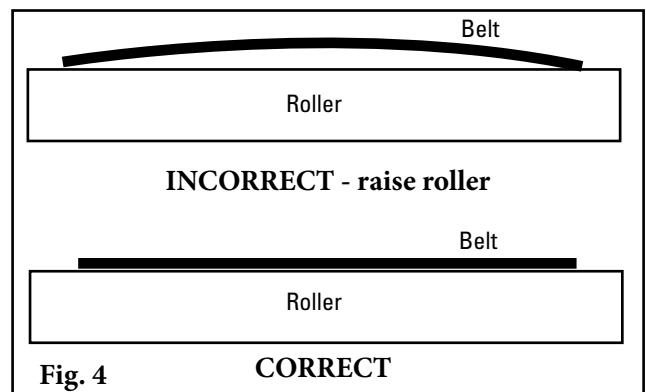


Fig. 4

4. **Lower the belt.** Ensure belt completely contacts roller. Raise brackets if there is not good contact (Fig. 4). Tighten all bolts.

5. **Adjust sensor rollers** so they are 19mm (3/4") from the belt on each side. Adjust by loosening the "A" and "B" bolts, then turning the "C" bolts (Fig. 5a & b).

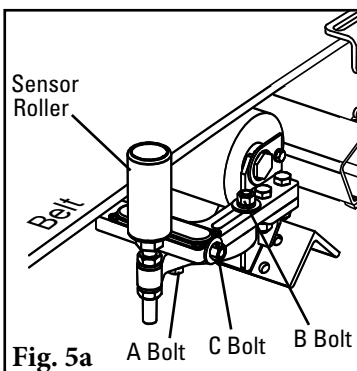


Fig. 5a


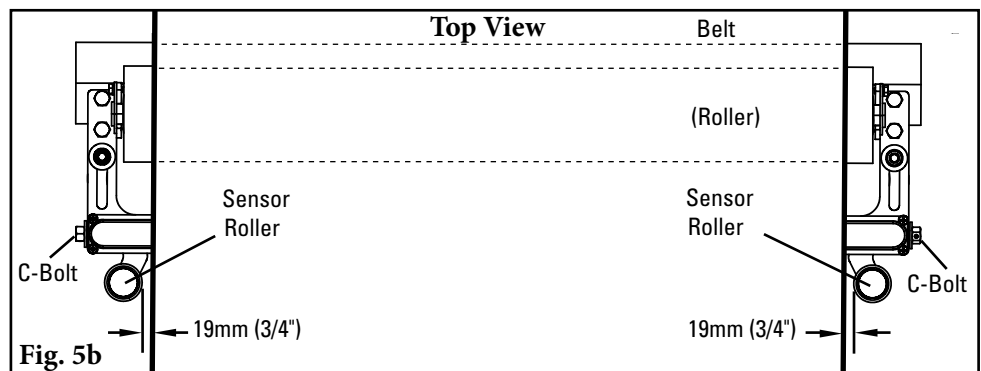


Fig. 5b

Section 6 - Maintenance

- Pivot the frame to the side it is mistracking.** Bring sensor roller in until it touches the belt. Move opposite sensor roller out to 38mm (1-1/2") from the belt (Fig 6).


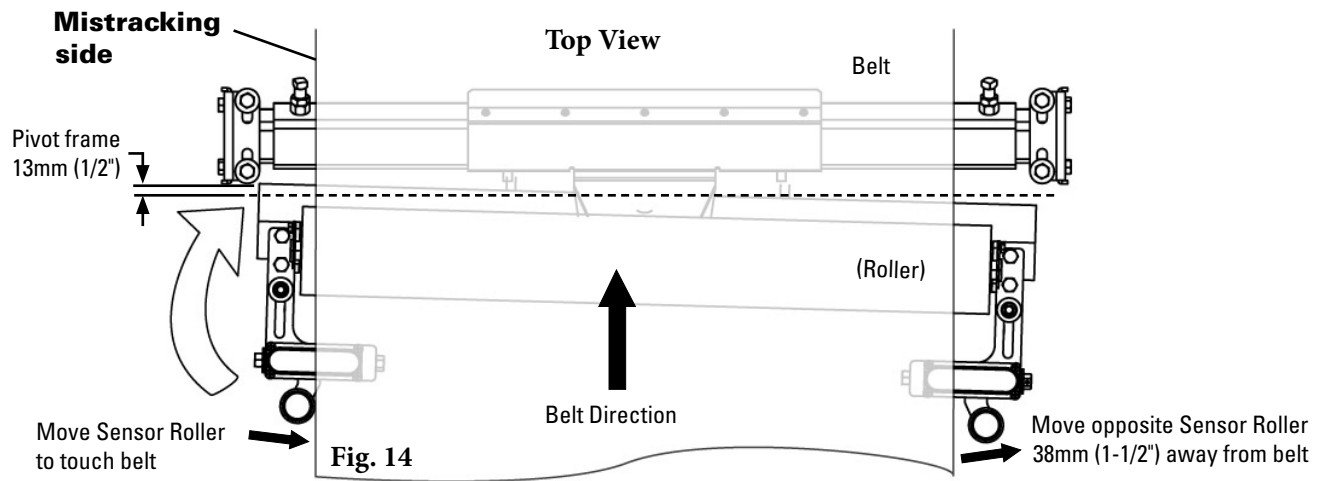


- Tighten all bolts and refer to pre-op checklist (page 10) before running the conveyor.** If belt is still mistracking, refer to Section 5.2 on page 10.


Section 6 - Maintenance (cont.)

6.5 Sensor Roller Replacement Instructions


1. Loosen "A" and "B" bolts, turn "C" bolts to move sensor rollers away from the belt (Fig. 1).
2. Loosen nut at base of sensor roller and remove from adjuster arm (Fig. 2).

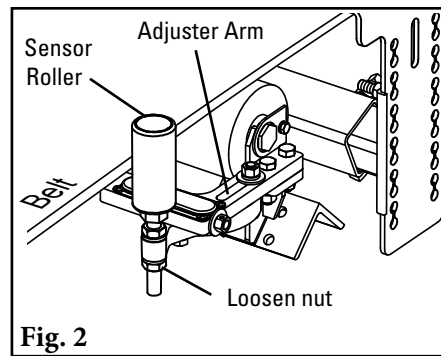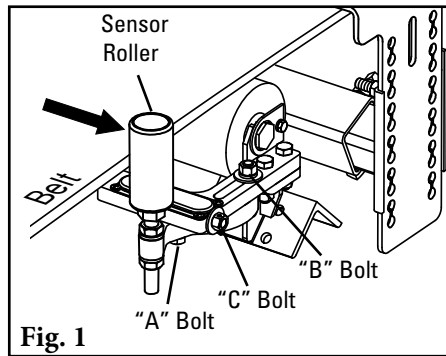

3. Install new sensor roller, reinstall nut, and adjust the sensor roll vertically using the adjustment nuts so the belt aligns with the center of the roller.
4. Adjust sensor rollers so they are 19mm (3/4") from the belt on each side. Adjust by turning the "C" bolts (Fig. 4).

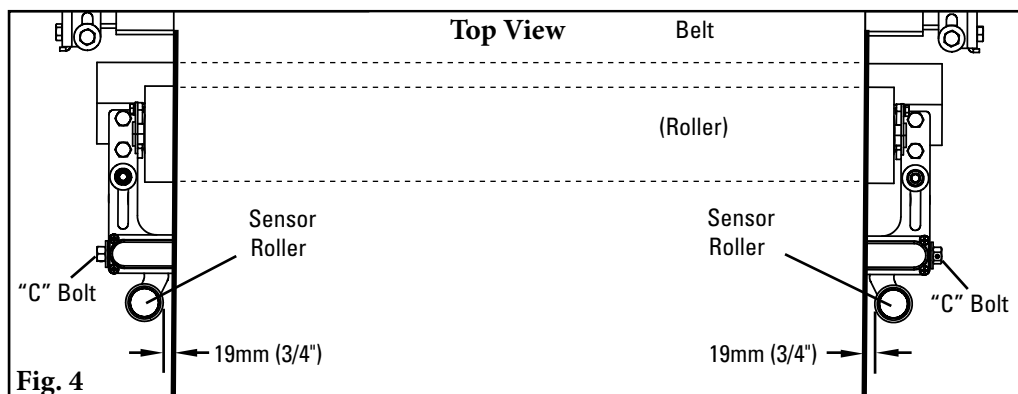

5. Pivot the frame 13mm (1/2") to the side it is mistracking. Bring sensor roller in until it touches the belt. Move opposite sensor roller out to 38mm (1-1/2") from the belt (Fig 5).

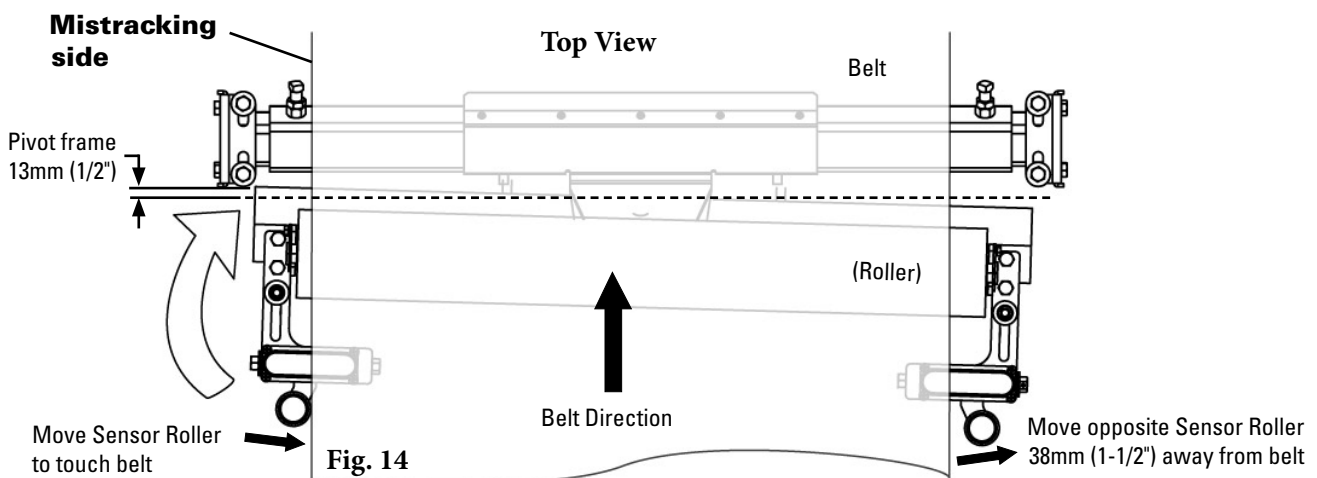

6. Tighten all bolts and refer to pre-op checklist (page 10) before running the conveyor. If belt is still mistracking, refer to Section 5.2 on page 10.

Section 6 - Maintenance (cont.)

6.6 Maintenance Log

Conveyor Name/No. _____

Date: _____ Work done by: _____ Service Quote #: _____

Activity: _____

Date: _____ Work done by: _____ Service Quote #: _____

Activity: _____

Date: _____ Work done by: _____ Service Quote #: _____

Activity: _____

Date: _____ Work done by: _____ Service Quote #: _____

Activity: _____

Date: _____ Work done by: _____ Service Quote #: _____

Activity: _____

Date: _____ Work done by: _____ Service Quote #: _____

Activity: _____

Date: _____ Work done by: _____ Service Quote #: _____

Activity: _____

Date: _____ Work done by: _____ Service Quote #: _____

Activity: _____

Section 6 - Maintenance

6.7 Belt Trainer Maintenance Checklist

PT Smart: _____ **Serial Number:** _____

Beltline Information:

Beltline Number: _____ Belt Condition: _____

Belt Width: 450mm (18") 600mm (24") 750mm (30") 900mm (36") 1050mm (42") 1200mm (48") 1350mm (54") 1500mm (60") 1800mm (72")

Belt Speed: _____ Belt Thickness: _____

Idler Roller Life:

Date Roller Installed: _____ Date Roller Inspected: _____ Estimated Roller Life: _____

Roller Condition: _____

Sensor Roller Life (Right Side):

Date Roller Installed: _____ Date Roller Inspected: _____ Estimated Roller Life: _____

Roller Condition: _____

Sensor Roller Life (Left Side):

Date Roller Installed: _____ Date Roller Inspected: _____ Estimated Roller Life: _____

Roller Condition: _____

PT Smart Frame Condition: Good Bent Rusted

Overall PT Smart Performance: (Rate the following 1 - 5, 1=very poor - 5= very good)

Appearance: Comments: _____

Location: Comments: _____

Maintenance: Comments: _____

Performance: Comments: _____



Other Comments: _____

Section 7 - Troubleshooting

Problem	Possible Cause	Possible Solutions
Little to no effect on trouble area of belt	Unit installed in wrong location	Relocate unit 20' (6M) after start of problem area of belt
	Incorrect tension on unit	Increase height of unit to provide 1/2" - 1" (13-25mm) lift on belt
	Unit mis-adjusted	Adjust sensor roller to provide more activation of unit
	Buildup on main roller	Clean unit
Belt not correcting enough	Unit mis-adjusted	Adjust sensor roll to provide more activation of unit
	Disc idlers on conveyor	Replace one disc idler before and one after the trainer with a standard idler
Belt moving over too much	Unit mis-adjusted	Adjust sensor roll to provide less activation of unit
Belt is jumping sensor roll	Unit located too low in structure	Increase height of unit to provide 13-25mm (1/2" - 1") lift on belt
Belt contacting both side sensors	Unit mis-adjusted	Adjust sensors to provide the 25mm (1") clearance so both sensors do not touch belt
Unit does not pivot	Buildup of material	Clean unit
Main roller not turning	Buildup on main roller	Clean unit
	Main roller bearing bad	Replace main roller



Section 8 - Specs and CAD Drawings

8.1 Specs and Guidelines

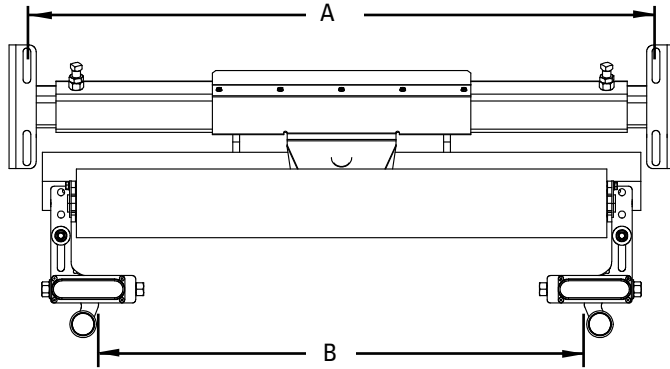

PT Smart Standard

Belt Width		Item Code	A	B	C	D (vertical adjustment)
mm	in.					
450	18	77664	575-875mm (23-35")	250-575mm (10-23")	250mm (10")	0-250mm (0"-10")
600	24	77665	725-1025mm (29-41")	400-725mm (16-29")		
750	30	77666	875-1175mm (35-47")	550-875mm (22-35")		
900	36	77667	1025-1325mm (41-53")	700-1025mm (28-41")		
1050	42	77668	1175-1475mm (47-59")	825-1175mm (33-47")		
1200	48	77669	1325-1625mm (53-65")	1000-1325mm (40-53")		
1350	54	77670	1475-1775mm (59-71")	1150-1475mm (46-59")		
1500	60	77671	1625-1925mm (65-77")	1300-1625mm (52-65")		
1800	72	77672	1925-2225mm (77-89")	1600-1925mm (64-77")		

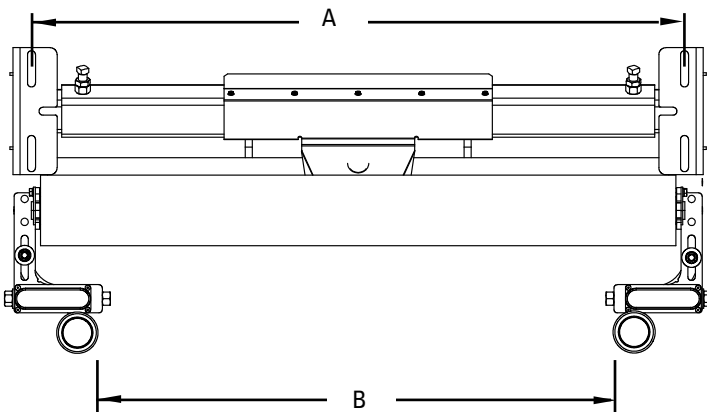


PT Smart Underground Structure

Belt Width		Item Code	A	B	C	D
mm	in.					
750	30	77673	875-1175mm (35-47")	675-1000mm (27-40")	250mm (10")	69mm to 331mm (2-3/4" to 13-1/4")
900	36	77674	1025-1325mm (41-53")	825-1150mm (33-46")		
1050	42	77675	1175-1475mm (47-59")	975-1300mm (39-52")		
1200	48	77676	1325-1625mm (53-65")	1125-1450mm (45-58")		
1350	54	77677	1475-1775mm (59-71")	1275-1600mm (51-64")		
1500	60	77678	1625-1925mm (65-77")	1425-1750mm (57-70")	262mm (10-1/2")	56mm to 319mm (2-1/4" to 12-3/4")
1800	72	77679	1925-2225mm (77-89")	1725-2050mm (69-82")		

Section 8 - Specs and CAD Drawings


8.2 CAD Drawing - PT Smart Standard

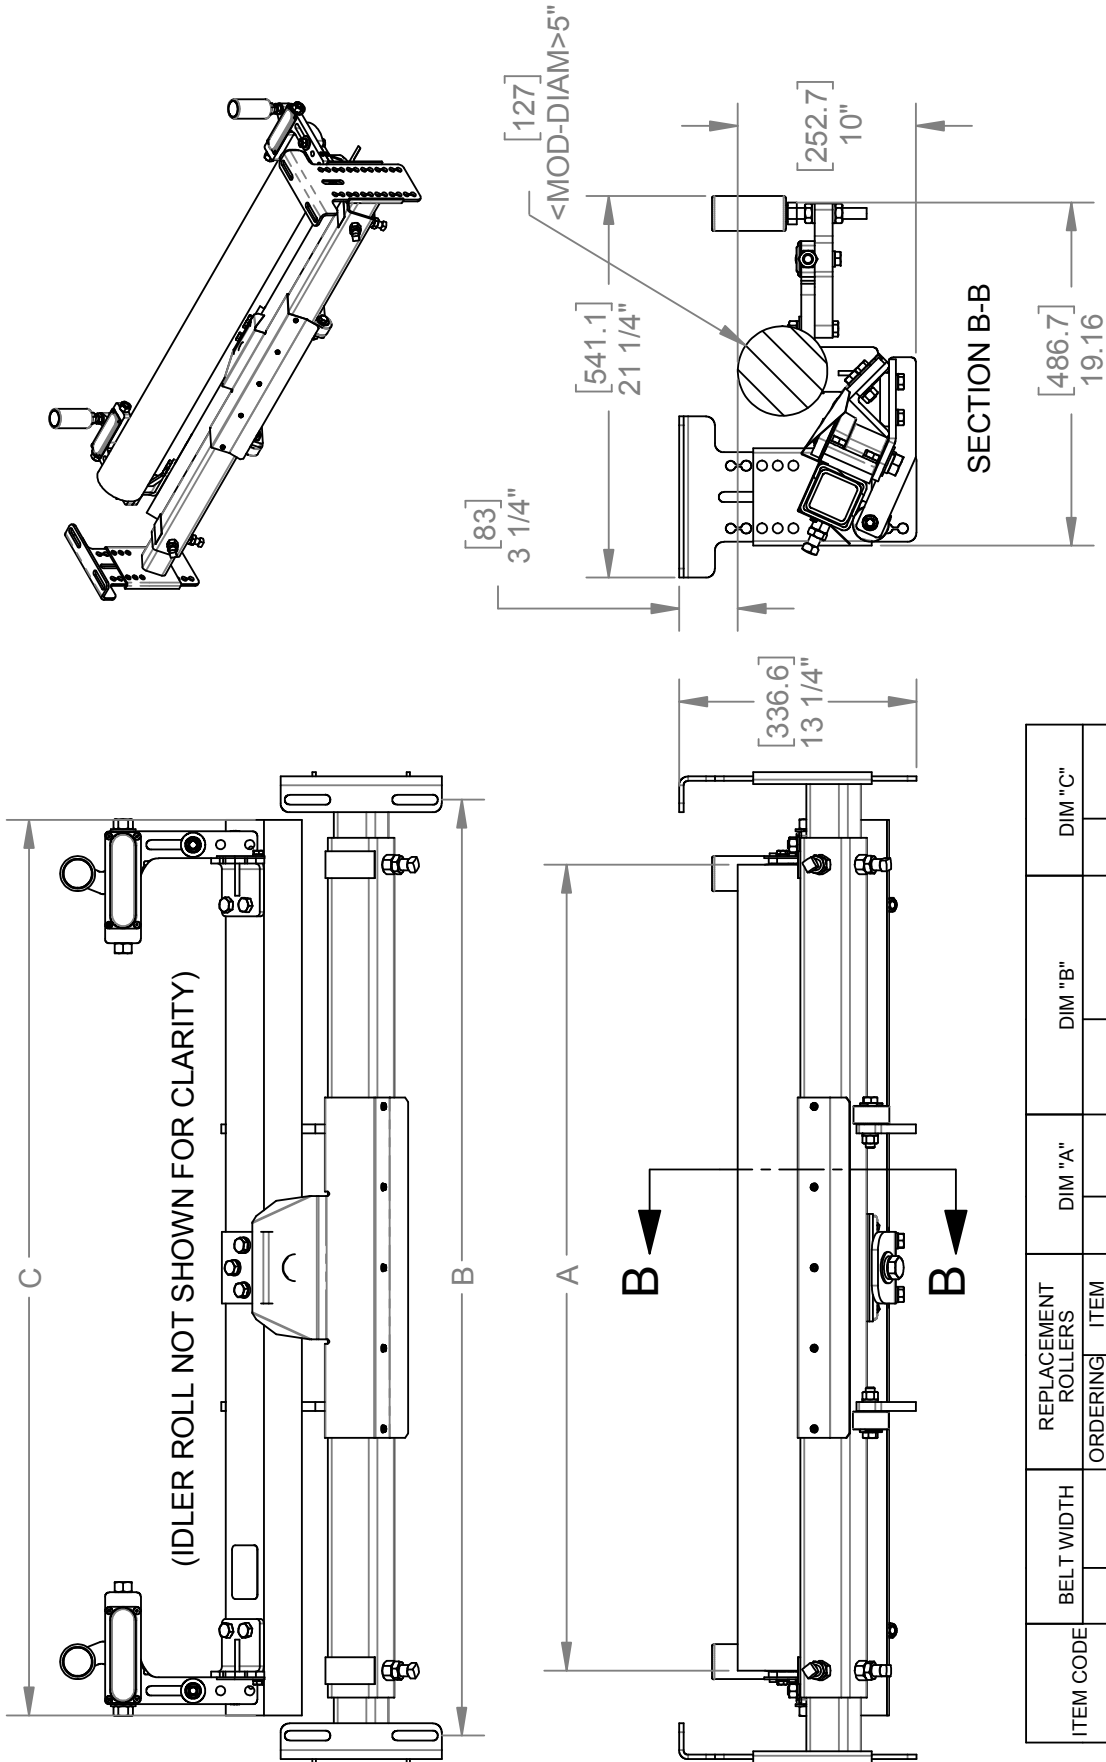

ITEM CODE	BELT WIDTH		REPLACEMENT ROLLERS		DIM "A"		DIM "B"		DIM "C"	
	in	mm	ORDERING NUMBER	ITEM CODE	in	mm	in	mm	in	mm
77664	18	450	PTS-RR21	77680	21	525	23-35	575-875	26	650
77665	24	600	PTS-RR27	77681	27	675	29-41	725-1025	32	800
77666	30	750	PTS-RR33	77682	33	825	35-47	875-1175	38	950
77667	36	900	PTS-RR39	77683	39	975	41-53	1025-1325	44	1100
77668	42	1050	PTS-RR45	77684	45	1125	47-59	1175-1475	50	1250
77669	48	1200	PTS-RR51	77685	51	1275	53-65	1325-1625	56	1400
77670	54	1350	PTS-RR57	77686	57	1425	59-71	1475-1775	62	1550
77671	60	1500	PTS-RR63	77687	63	1575	65-77	1325-1925	68	1700


Section 8 - Specs and CAD Drawings

8.3 CAD Drawing - PT Smart Underground Structure

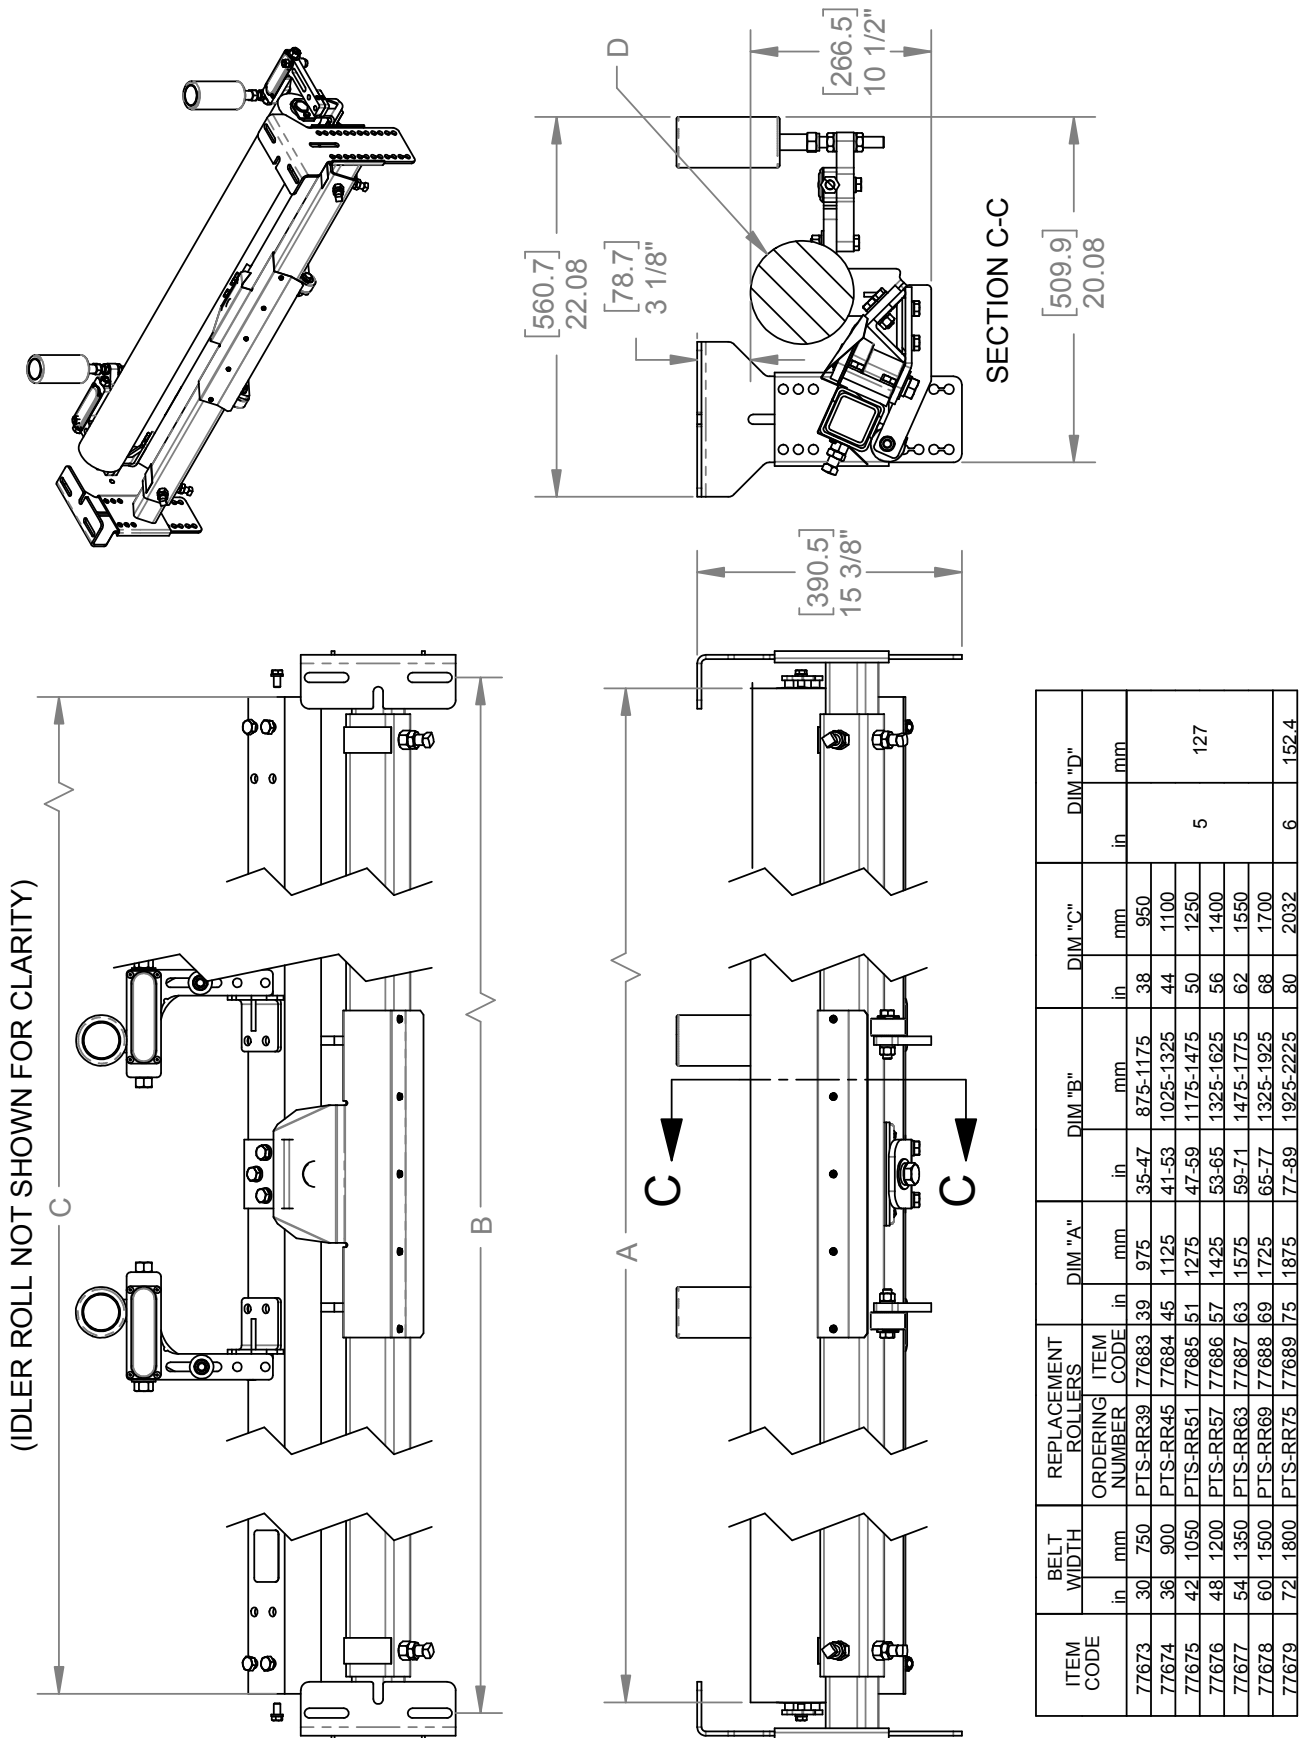

Section 9 - Replacement Parts

9.1 Replacement Parts List

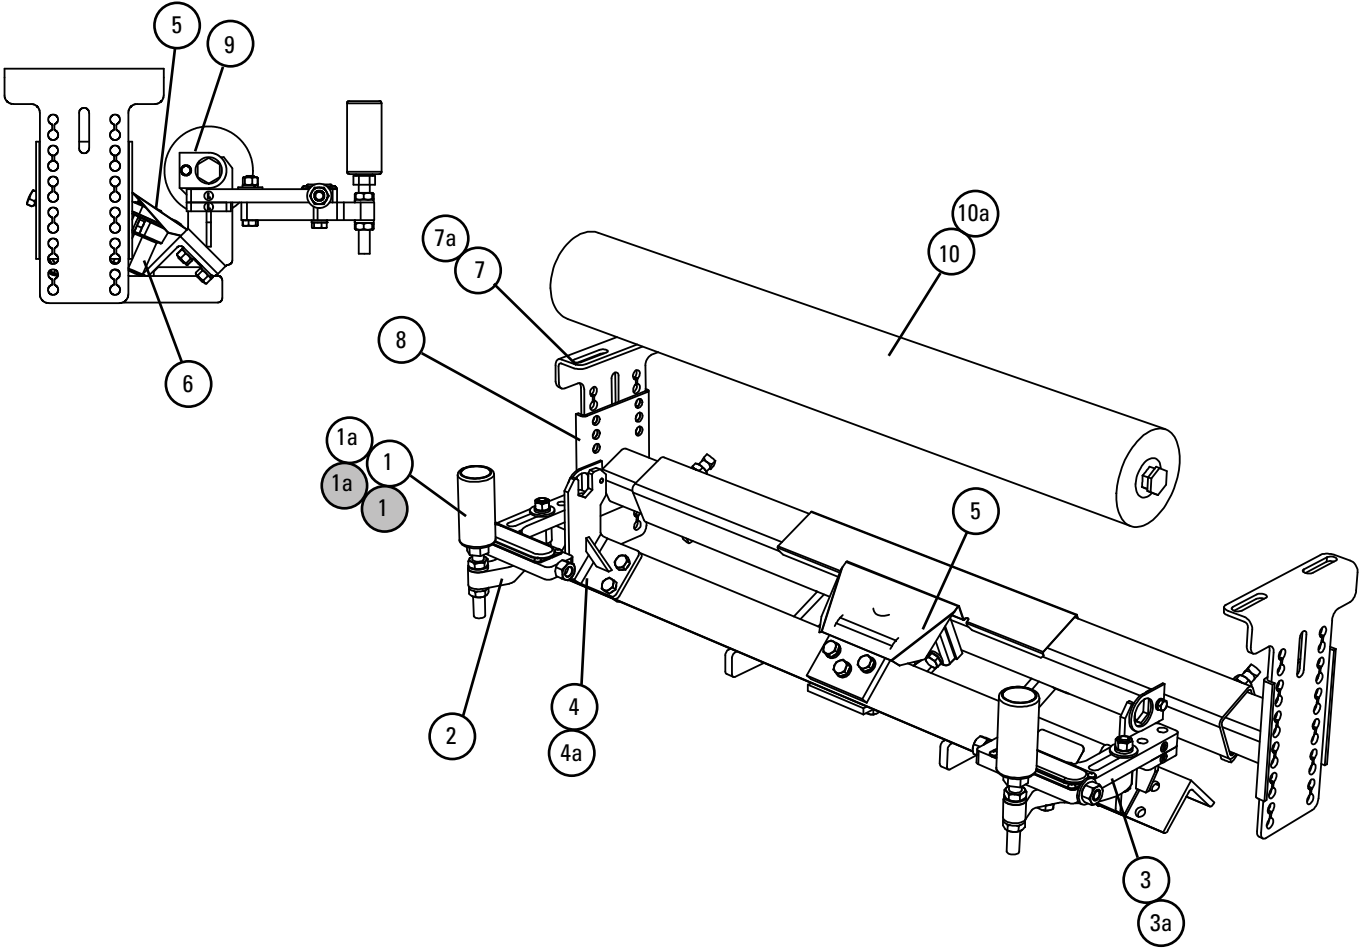

Replacement Parts

Ref	Description	Ordering Number	Item Code
1	PTS STD Sensor Roller (2")	PTS-ASR	93089
1a	PTS HD Sensor Roller (3")	PTS-AHDSR	93090
2	PTS Sensor Arm Kit (incl. 1 ea.)	PTS-SAK	77694
3	PTS RH Sensor Adjuster Assy	PTS-RHSAA	77755
3a	PTS LH Sensor Adjuster Assy	PTS-LHSAA	77756
4	PTS Idler Bracket Kit (incl. L & R)	PTS-IBK	77696
4a	PTS HD Idler Bracket Kit (incl. L & R)	PTS-HIBK	77697
5	PTS Pivot Shield	PTS-PS	77698
6	PTS Pivot Assy (Axle and housing)	PTS-PA	77699
7	PTS Mounting Bracket Kit	PTS-MBK	77700
7a	PTS Mounting Bracket Kit U/G	PTS-MBKUG	77701
8	PTS Extending Bracket Kit (incl. L & R)	PTS-EBK	77702
9	Roller Retainer Kit	RBPRET	73163

*Hardware included
Lead time: 1 working day

Legacy Replacement Sensor Rollers - For PT Smart Units Shipped Prior to Feb. 24, 2021

Ref	Description	Ordering Number	Item Code
L1	PTS STD Sensor Roller (2")	PTS-SR	77691
L1a	PTS HD Sensor Roller (3")	PTS-HDSR	77692

Replacement Rollers


Ref	Belt Width		Description	Ordering Number	Item Code
	mm	in.			
FOR PT SMART™ STANDARD STRUCTURE					
10	450	18	PTS Repl Roller 525 mm (21")	PTS-RR21	77680
	600	24	PTS Repl Roller 675 mm (27")	PTS-RR27	77681
	750	30	PTS Repl Roller 825 mm (33")	PTS-RR33	77682
	900	36	PTS Repl Roller 975 mm (39")	PTS-RR39	77683
	1050	42	PTS Repl Roller 1125 mm (45")	PTS-RR45	77684
	1200	48	PTS Repl Roller 1275 mm (51")	PTS-RR51	77685
	1350	54	PTS Repl Roller 1425 mm (57")	PTS-RR57	77686
	1500	60	PTS Repl Roller 1575 mm (63")	PTS-RR63	77687
	1800	72	PTS Repl Roller 1875 mm (75")	PTS-RR75	77689
FOR PT SMART™ UNDERGROUND STRUCTURE					
10a	750	30	PTS Repl Roller 975 mm (39")	PTS-RR39	77683
	900	36	PTS Repl Roller 1125 mm (45")	PTS-RR45	77684
	1050	42	PTS Repl Roller 1275 mm (51")	PTS-RR51	77685
	1200	48	PTS Repl Roller 1425 mm (57")	PTS-RR57	77686
	1350	54	PTS Repl Roller 1575 mm (63")	PTS-RR63	77687
	1500	60	PTS Repl Roller 1725 mm (69")	PTS-RR69	77688
	1800	72	PTS Repl Roller 2025 mm (81")	PTS-RR81	77690

Lead time: 1 working day

Section 10 - Other Flexco Conveyor Products


Flexco provides many conveyor products that help your conveyors to run more efficiently and safely. These components solve typical conveyor problems and improve productivity. Here is a quick overview on just a few of them:

EZP1 Precleaner

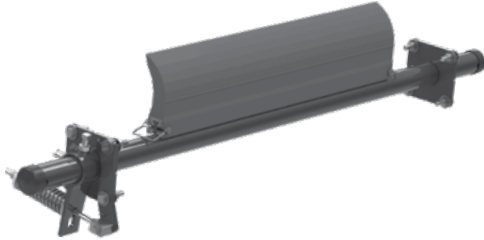

- Patented ConShear™ blade renews its cleaning edge as it wears
- Visual Tension Check™ for optimal blade tensioning and simple retensioning
- Quick and easy one-pin blade replacement
- Material Path Option™ for optimal cleaning and reduced maintenance

Flex-Lok™ Skirt Clamps



- Eliminates transfer zone spillage
- Interlocking design for easy installation and one-person maintenance
- Unique wedge pin holds rubber securely in place and is easy to adjust
- Available in various models and in stainless steel

MMP Precleaner




- Extra cleaning power for tough applications
- 10" TuffShear™ blade provides increased blade-to-belt tension
- A 3-piece telescoping pole is lighter to lift and easier to install
- Dual Quick-Mount Tensioners ensure optimal tension throughout the life of the blade

PT Max™ Belt Trainer




- Patented "pivot & tilt" design for superior training action
- Dual sensor rollers on each side to minimize belt damage
- Pivot point guaranteed not to freeze up
- Available for topside and return side belts

MHS Secondary Cleaner with Service Advantage Cartridge

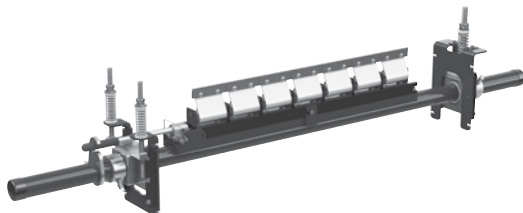

- An easy slide-out cartridge for service
- Cartridge design to speed up blade-change maintenance
- Patented PowerFlex™ Cushions for superior cleaning performance
- Compatible with Flexco mechanical splices

Belt Plows

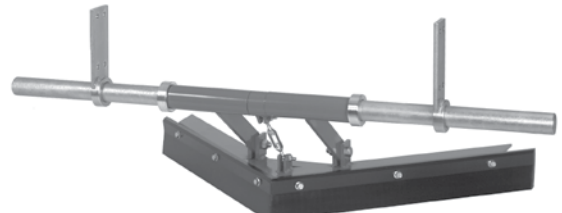

- A belt cleaner for the tail pulley
- Exclusive blade design quickly spirals debris off the belt
- Economical and easy to service
- Available in vee or diagonal models

上海市松江区新润路388号17幢 (邮编: 201612)
电话: 0086-21-33528388 • 传真: 0086-21-33528058 • 电子邮件: chinasales@flexco.com
客服热线: 400 820 6896

请访问 www.flexco.com 网站, 了解 Flexco 其他分公司和产品。

©2021 Flexible Steel Lacing Company. 03/25/21. 资料编码: X2852

