


# EZP1 Rockline® Standard-Duty Precleaner

## Simple, Quick, Effective Belt Cleaning for Cement Operations

The EZP1 Precleaner is not your average solid-blade belt cleaner that mounts on the head pulley. It features a unique single blade design that combines simple, do-it-yourself installation, quick maintenance, and effective cleaning results with a price tag that you can afford. Install the EZP1 anywhere throughout the process where dust is widespread to facilitate the capture of usable material and avoid potential safety citations for hazardous piles. High-Temp and Ultra High-Temp blade options are available for belts carrying clinker.

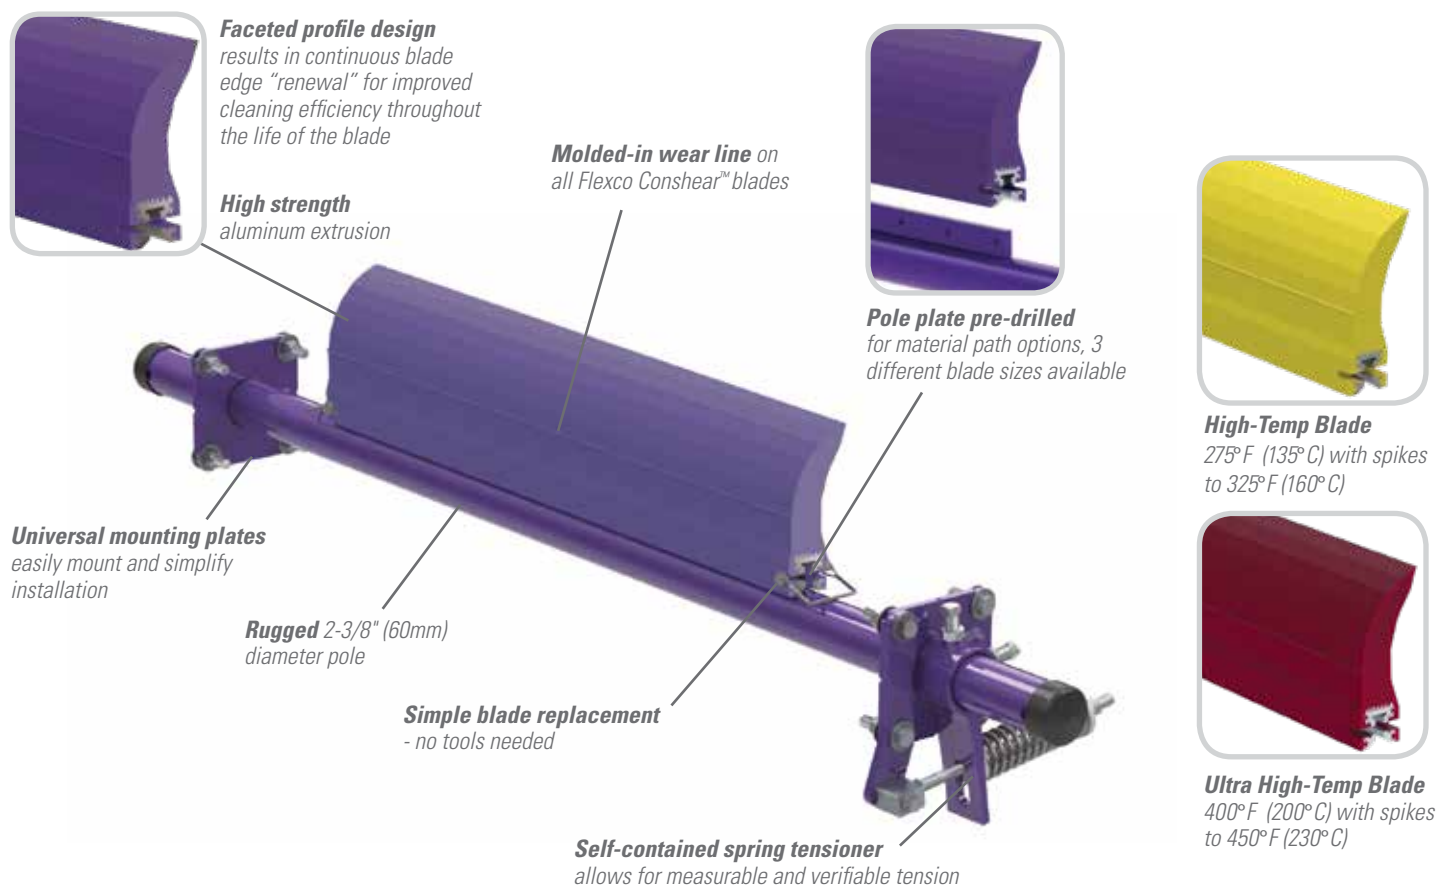

## Features and Benefits



- **Works with Flexco mechanical splices.** The spring tensioner allows the blade to quickly move away from the belt when a splice passes. The polyurethane blade material easily glides over the splice without damage and with minimal cleaning disruption.
- **Compact, streamlined design.** The EZP1 Precleaner requires only 4" (100 mm) of horizontal clearance for correct installation. Its streamlined contours prevent material buildup on the blade or the pole.
- **Can be used on reversing belts.** Installing cleaners on both pulleys gives superior cleaning results on belts that run in both directions.
- **Fits most conveyor structures.** Available for belt widths from 12" to 72" (300 to 1800mm).
- **Blade can be used on other cleaners.** The ConShear™ blade can be used as a replacement blade on many OEM cleaners.

# EZP1


## Rockline® Standard-Duty Precleaner

### Specifications and Guidelines

- Maximum Belt Speed**  
700 FPM (3.5 M/sec)
- Temperature Rating**  
**Purple:** -30°F to 180°F (-35°C to 82°C)  
**Yellow:** -30°F to 275°F (-35°C to 135°C)  
**Spikes to 325°F (160°C)**  
**Red:** -30°F to 400°F (-35°C to 200°C)  
**Spikes to 450°F (230°C)**
- Minimum Pulley Diameter**  
10" (250 mm)
- Blade Height**  
7-1/4" (185 mm)
- Usable Blade Wear Length**  
4" (100 mm)
- Blade Material**  
**Purple:** Polyurethane 83 durometer  
**Yellow:** Polyurethane 93 durometer  
**Red:** Ultra High-Temp Polyurethane 90 durometer  
(proprietary blends for abrasion resistance and long wear)
- CEMA Cleaner Rating**  
Class 3
- Available for Belt Widths**  
12" to 72" (300 to 1800 mm)
- Horizontal Clearance Required**  
4" (100 mm)
- Vertical Clearance Required**  
9-1/2" (238 mm)
- Pole Length**  
Cleaner size up to 48": + 30"  
Cleaner size over 48": + 34"  
(Cleaner size up to 1200mm: + 750mm)  
(Cleaner size over 1200mm: + 850mm)
- Maximum Conveyor Span**  
Cleaner size up to 48": + 25"  
Cleaner size over 48": + 29"  
(Cleaner size up to 1200mm: + 625mm)  
(Cleaner size over 1200mm: + 725mm)

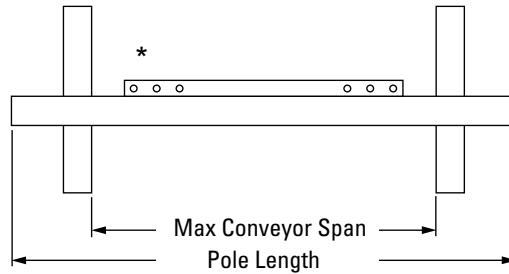

### Pole Location Specs

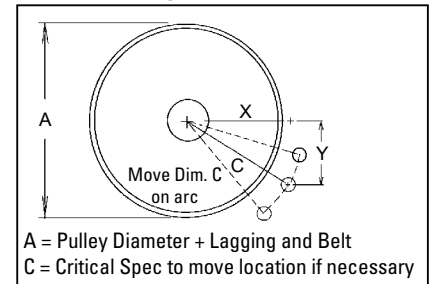

### Ordering Information - EZP1 Belt Cleaners

Belt Width	Blade Coverage				EZP1 with Purple Blade				EZP1 with Yellow HT Blade				EZP1 with Red UHT Blade				
	-2" (50mm) Coverage		-8" (200mm) Coverage		BW - 2" (50mm)		BW - 8" (200mm)		BW - 2" (50mm)		BW - 8" (200mm)		BW - 2" (50mm)		BW - 8" (200mm)		
in.	mm	in.	mm	in.	mm	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code
12	300	10	250	-	-	EZP1-212	75610	N/A	N/A	HTF212	76658	N/A	N/A	EZP1-UHT212	91226	N/A	N/A
18	450	16	400	10	250	EZP1-218	75611	EZP1-818	75779	HTF218	76659	HTF818	90817	EZP1-UHT218	91227	EZP1-UHT818	91236
24	600	22	550	16	400	EZP1-224	75612	EZP1-824	75780	HTF224	76660	HTF824	90818	EZP1-UHT224	91228	EZP1-UHT824	91237
30	750	28	700	22	550	EZP1-230	75613	EZP1-830	75781	HTF230	76661	HTF830	90819	EZP1-UHT230	91229	EZP1-UHT830	91238
36	900	34	850	28	700	EZP1-236	75614	EZP1-836	75782	HTF236	76662	HTF836	90820	EZP1-UHT236	91230	EZP1-UHT836	91239
42	1050	40	1000	34	850	EZP1-242	75615	EZP1-842	75783	HTF242	76663	HTF842	90821	EZP1-UHT242	91231	EZP1-UHT842	91240
48	1200	46	1150	40	1000	EZP1-248	75616	EZP1-848	75784	HTF248	76664	HTF848	90822	EZP1-UHT248	91232	EZP1-UHT848	91241
54	1350	52	1300	46	1150	EZP1-254	75617	EZP1-854	75785	HTF254	76665	HTF854	90823	EZP1-UHT254	91233	EZP1-UHT854	91242
60	1500	58	1450	52	1300	EZP1-260	75618	EZP1-860	75786	HTF260	76666	HTF860	90824	EZP1-UHT260	91234	EZP1-UHT860	91243
72	1800	70	1750	64	1600	EZP1-272	75771	EZP1-872	75774	HTF272	76667	HTF872	90825	EZP1-UHT272	91235	EZP1-UHT872	91244

Pole Location Chart			
A	X	Y	C
10"	3"	9"	9-1/2"
11"	3-3/4"	9"	9-3/4"
12"	4-3/8"	9"	10"
13"	5-3/8"	9"	10-1/2"
14"	5-7/8"	9"	10-3/4"
15"	6-3/4"	9"	11-1/4"
16"	7-1/8"	9"	11-1/2"
17"	7-7/8"	9"	12"
18"	8-1/4"	9"	12-1/4"
19"	9"	9"	12-3/4"
20"	9-3/8"	9"	13"
21"	10"	9"	13-1/2"
22"	10-3/4"	9"	14"
23"	11-3/8"	9"	14-1/2"
24"	12"	9"	15"
25"	12-5/8"	9"	15-1/2"
26"	13-1/4"	9"	16"
27"	13-7/8"	9"	16-1/2"
28"	14-3/8"	9"	17"
29"	15"	9"	17-1/2"
30"	15-5/8"	9"	18"
31"	16-1/8"	9"	18-1/2"
32"	16-3/4"	9"	19"
33"	17-1/4"	9"	19-1/2"
34"	17-7/8"	9"	20"
35"	18-3/8"	9"	20-1/2"
36"	19"	9"	21"

### ConShear Replacement Blades

Blade Width	Purple Blades		Yellow HT Blades		Red UHT Blades		
	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	
10	250	CRB10	75628	CRB-HT10	76593	CRB-UHT10	91253
16	400	CRB16	75629	CRB-HT16	76594	CRB-UHT16	91254
22	550	CRB22	75630	CRB-HT22	76595	CRB-UHT22	91255
28	700	CRB28	75631	CRB-HT28	76596	CRB-UHT28	91256
34	850	CRB34	75632	CRB-HT34	76597	CRB-UHT34	91257
40	1000	CRB40	75633	CRB-HT40	76598	CRB-UHT40	91258
46	1150	CRB46	75634	CRB-HT46	76599	CRB-UHT46	91259
52	1300	CRB52	75635	CRB-HT52	76600	CRB-UHT52	91260
58	1450	CRB58	75636	CRB-HT58	76601	CRB-UHT58	91261
64	1600	CRB64	75775	CRB-HT64	76602	CRB-UHT64	91262
70	1750	CRB70	75773	CRB-HT70	76603	CRB-UHT70	91263



Authorized Distributor: